

# Process Optimization

## Mathematical Programming and Optimization of Multi-Plant Operations and Process Design

Ralph W. Pike

Director, Minerals Processing Research Institute  
Horton Professor of Chemical Engineering  
Louisiana State University

# Process Optimization

- Typical Industrial Problems
- Mathematical Programming Software
- Mathematical Basis for Optimization
- Lagrange Multipliers and the Simplex Algorithm
- Generalized Reduced Gradient Algorithm
- On-Line Optimization
- Mixed Integer Programming and the Branch and Bound Algorithm
- Chemical Production Complex Optimization

# New Results

- Using one computer language to write and run a program in another language
- Cumulative probability distribution instead of an optimal point using Monte Carlo simulation for a multi-criteria, mixed integer nonlinear programming problem
- Global optimization

# Design vs. Operations

- Optimal Design
  - Uses flowsheet simulators and SQP
  - Heuristics for a design, a superstructure, an optimal design
- Optimal Operations
  - On-line optimization
  - Plant optimal scheduling
  - Corporate supply chain optimization

# Plant Problem Size

	Contact 3,200 TPD	Alkylation 15,000 BPD	Ethylene 200 million lb/yr
Units	14	76	~200
Streams	35	110	~4,000
Constraints			
Equality	761	1,579	~400,000
Inequality	28	50	~10,000
Variables			
Measured	43	125	~300
Unmeasured	732	1,509	~10,000
Parameters	11	64	~100

# Optimization Programming Languages

- GAMS - **G**eneral **A**lgebraic **M**odeling **S**ystem
- LINDO - Widely used in business applications
- AMPL - **A** **M**athematical **P**rogramming  
Language
- Others: MPL, ILOG

optimization program is written in the form of an  
optimization problem

optimize:  $y(\mathbf{x})$       economic model

subject to:  $f_i(\mathbf{x}) = 0$       constraints

# Software with Optimization Capabilities

- Excel – Solver
- MATLAB
- MathCAD
- Mathematica
- Maple
- Others

# Mathematical Programming


- Using Excel – Solver
- Using GAMS
- Mathematical Basis for Optimization
- Important Algorithms
  - Simplex Method and Lagrange Multipliers
  - Generalized Reduced Gradient Algorithm
  - Branch and Bound Algorithm



# Simple Chemical Process

minimize:  $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$

subject to:  $P \cdot R = 9000$

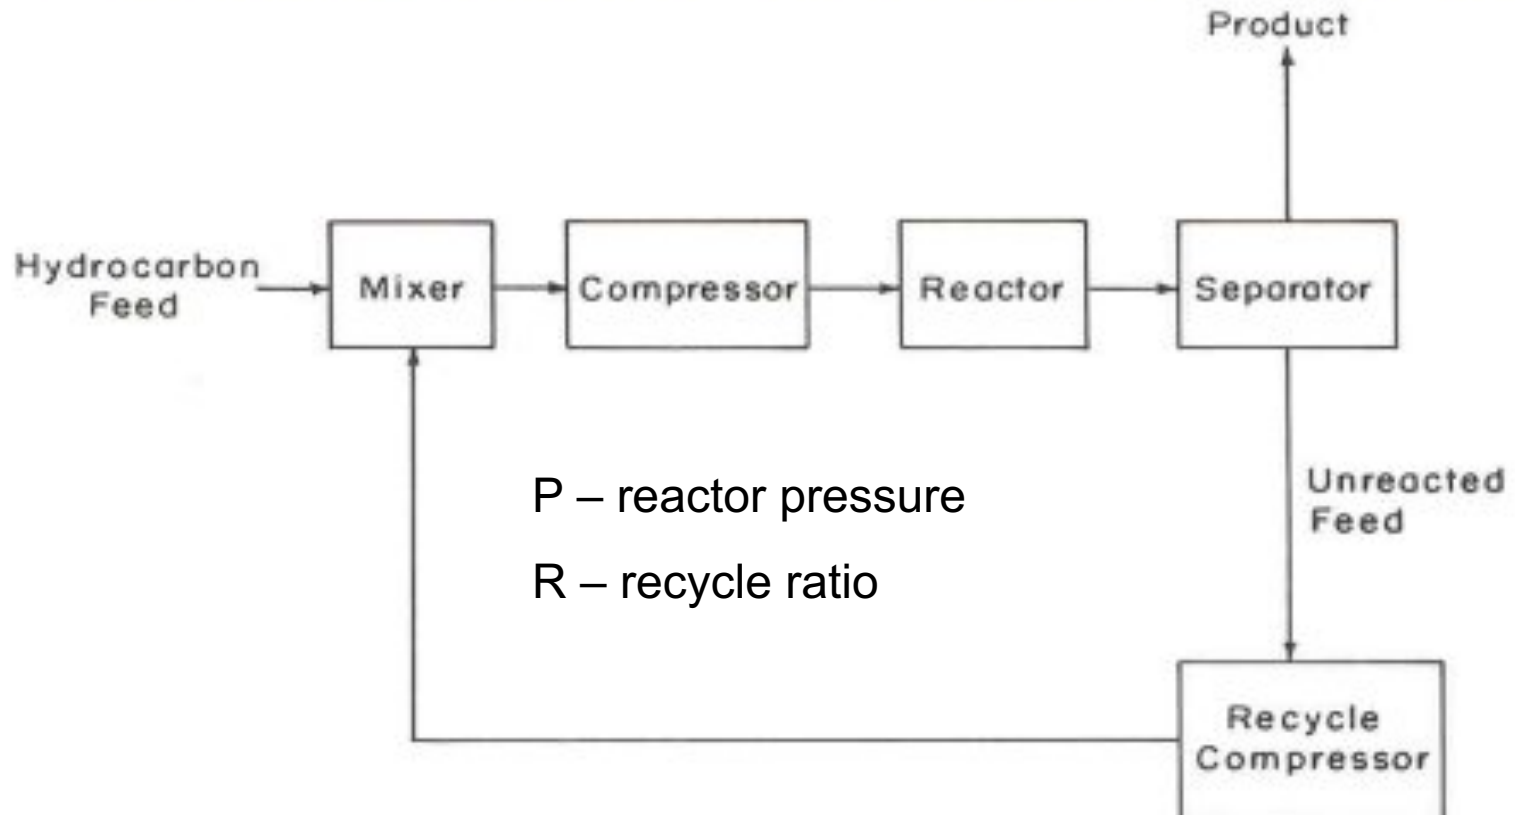

# Excel Solver Example

Solver optimal solution

		Example 2-6 p. 30 OES A Nonlinear Problem
C	3.44E+06	minimize: $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$
P*R	9000.0	subject to: $P \cdot R = 9000$
P	6.0	Solution
R	1500.0	$C = 3.44 \times 10^6$
		$P = 1500 \text{ psi}$
		$R = 6$

Showing the equations in the Excel cells with initial values for P and R

C	$=1000 \cdot D5 + 4 \cdot 10^9 / (D5 \cdot D4) + 2.5 \cdot 10^5 \cdot D4$
P*R	$=D5 \cdot D4$
P	1
R	1

# Excel Solver Example

	A	B	C	D	E	F	G	H	I	J
1						Example 2-6 p. 30 OES A Nonlinear Problem minimize: $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$ subject to: $P \cdot R = 9000$ Solution $C = 3.44 \times 10^6$ $P = 1500$ psi $R = 6$				
2			C	4.00E+09						
3			P*R	1.0						
4			P	1.0						
5			R	1.0						
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										

Solver Parameters

Set Target Cell:

Equal To:
☐ Max
☒ Min
☐ Value of:

By Changing Cells:

Subject to the Constraints:

# Excel Solver Example

Not the minimum  
for C

	A	B	C	D	E	F	G	H	I	J
1										
2			C	4.40E+06						
3			P*R	9000.0						
4			P	13.1						
5			R	687.7						
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										

Example 2-6 p. 30 OES A Nonlinear Problem  
 minimize:  $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$   
 subject to:  $P \cdot R = 9000$   
 Solution  
 $C = 3.44 \times 10^6$   
 $P = 1500$  psi  
 $R = 6$

**Solver Results**

Solver has converged to the current solution. All constraints are satisfied.

☒ Keep Solver Solution  
☐ Restore Original Values

Reports  
 Answer  
 Sensitivity  
 Limits

OK Cancel Save Scenario... Help


N  
o  
t

Use Solver with these values of P and R


# Excel Solver Example

	A	B	D	E	F	G	H	I	J
1					Example 2-6 p. 30 OES A Nonlinear Problem minimize: $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$ subject to: $P \cdot R = 9000$ Solution $C = 3.44 \times 10^6$ $P = 1500$ psi $R = 6$				
2		C	4.40E+06						
3		P*R	9000.0						
4		P	13.1						
5		R	687.7						
6									
7									

**Solver Parameters**

Set Target Cell:  

Equal To: ☐ Max ☒ Min ☐ Value of:

By Changing Cells:  

Subject to the Constraints:

# Excel Solver Example

	A	B	C	D	E	F	G	H	I	J
1						Example 2-6 p. 30 OES A Nonlinear Problem minimize: $C = 1,000P + 4 \cdot 10^9 / P \cdot R + 2.5 \cdot 10^5 R$ subject to: $P \cdot R = 9000$ Solution $C = 3.44 \times 10^6$ $P = 1500$ psi $R = 6$				
2			C	3.44E+06						
3			P*R	9000.0						
4			P	6.0						
5			R	1500.0						
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										

optimum

Click to highlight to generate reports

Solver Results

Solver found a solution. All constraints and optimality conditions are satisfied.

☒ Keep Solver Solution  
☐ Restore Original Values

Reports  
 Answer  
 Sensitivity  
 Limits

OK Cancel Save Scenario... Help

# Excel Solver Example

**Solver Options**

Max Time: 100 seconds

Iterations: 100

Precision: 0.000001

Tolerance: 5 %

Convergence: 0.0001

☐ Assume Linear Model ☐ Use Automatic Scaling

☐ Assume Non-Negative ☐ Show Iteration Results

**Estimates**

☒ Tangent ☐ Quadratic

**Derivatives**

☒ Forward ☐ Central

**Search**

☒ Newton ☐ Conjugate

OK Cancel Load Model... Save Model... Help

## Search

Specifies the algorithm used at each iteration to determine the direction to search.

**Newton** Uses a quasi-Newton method that typically requires more memory but fewer iterations than the Conjugate gradient method.

**Conjugate** Requires less memory than the Newton method but typically needs more iterations to reach a particular level of accuracy. Use this option when you have a large problem and memory usage is a concern, or when stepping through iterations reveals slow progress.

Information from Solver Help is of limited value

## Derivatives

Specifies the differencing used to estimate partial derivatives of the objective and constraint functions.

**Forward** Use for most problems, in which the constraint values change relatively slowly.

**Central** Use for problems in which the constraints change rapidly, especially near the limits. Although this option requires more calculations, it might help when Solver returns a message that it could not improve the solution.

## Estimates

Specifies the approach used to obtain initial estimates of the basic variables in each one-dimensional search.

**Tangent** Uses linear extrapolation from a tangent vector.

**Quadratic** Uses quadratic extrapolation, which can improve the results on highly nonlinear problems.

# Excel Solver Answer Report

management report  
format

## Microsoft Excel 11.0 Answer Report

Target Cell (Min)

values at the  
optimum

Cell Name	Original Value	Final Value
\$D\$2 C	3.44E+06	3.44E+06

Adjustable Cells

Cell Name	Original Value	Final Value
\$D\$5 R	1500.0	1500.0
\$D\$4 P	6.0	6.0

constraint  
status

slack  
variable

Constraints

Cell Name	Cell Value	Formula	Status	Slack
\$D\$3 P*R	9000.0	\$D\$3=9000	Not Binding	0



# Excel Sensitivity Report

## Microsoft Excel 11.0 Sensitivity Report

### Adjustable Cells

		Final	Reduced
	Cell Name	Value	Gradient
6	\$D\$5 R	1500.0	0.0
7	\$D\$4 P	6.0	0.0

Solver uses the generalized reduced gradient optimization algorithm

### Constraints

		Final	Lagrange
	Cell Name	Value	Multiplier
12	\$D\$3 P*R	9000.0	117.3

Lagrange multipliers used for sensitivity analysis

Shadow prices (\$ per unit)

# Excel Solver Limits Report

**Sensitivity Analysis provides limits on variables for the optimal solution to remain optimal**

## Microsoft Excel 11.0 Limits Report

Target		
Cell	Name	Value
\$D\$2	C	3.44E+06

Adjustable		
Cell	Name	Value
\$D\$5	R	1500.0
\$D\$4	P	6.0

Lower Limit	Target Result
1500.0	3.44E+06
6.0	3.44E+06

Upper Limit	Target Result
1500.0	3.44E+06
6.0	3.44E+06

# GAMS

IDE C:\Backup\WPDOCS\OPT\GAMS\Example 2-6 p 30 OES Recycle.gms

Example 2-6 p 30 OES Recycle.gms

```
$TITLE Recycle
$OFFSYMREF
$OFFSYMLIST
* Example 2-6 on p. 30 of OES

VARIABLES P,R, Z;
POSITIVE VARIABLES P,R;

EQUATIONS CON1, OBJ;

CON1.. P*R =E= 9000;
OBJ.. Z =E= 1000*P + 4*1000000000/(P*R) + 2.5*100000*R;

P.LO=1; R.LO=1;

MODEL Recycle /ALL/;

SOLVE Recycle USING NLP MINIMIZING Z;

DISPLAY P.L, R.L, Z.L;
```

# GAMS

## SOLVE SUMMARY

MODEL Recycle            OBJECTIVE Z  
TYPE NLP                DIRECTION MINIMIZE  
SOLVER CONOPT           FROM LINE 18

\*\*\*\* SOLVER STATUS    1 NORMAL COMPLETION  
\*\*\*\* MODEL STATUS    2 LOCALLY OPTIMAL  
\*\*\*\* OBJECTIVE VALUE       3444444.4444

RESOURCE USAGE, LIMIT	0.016	1000.000
ITERATION COUNT, LIMIT	14	10000
EVALUATION ERRORS	0	0

C O N O P T 3 x86/MS Windows version 3.14P-016-057  
Copyright (C) ARKI Consulting and Development A/S  
Bagsvaerdvej 246 A  
DK-2880 Bagsvaerd, Denmark

Using default options.

The model has 3 variables and 2 constraints with 5 Jacobian elements, 4 of which are nonlinear.

The Hessian of the Lagrangian has 2 elements on the diagonal, 1 elements below the diagonal, and 2 nonlinear variables.

**\*\* Optimal solution. Reduced gradient less than tolerance.**

# GAMS

Lagrange  
multiplier

- LOWER    LEVEL    UPPER    MARGINAL
- ---- EQU CON1       9000.000 9000.000 9000.000 117.284
- ---- EQU OBJ       .       .       .       1.000

- LOWER    LEVEL    UPPER    MARGINAL
- ---- VAR P       1.000       1500.000       +INF       .
- ---- VAR R       1.000       6.000       +INF       EPS
- ---- VAR Z       -INF       3.4444E+6       +INF       .

values at the  
optimum

- \*\*\*\* REPORT SUMMARY :       0    NONOPT
- 0 INFEASIBLE
- 0 UNBOUNDED
- 0    ERRORS

900 page Users Manual

# GAMS Solvers

Options

Editor | Execute | Output | Solvers | Licenses | Colors | File Extensions | Execute2

Project Defaults

Reset

Legend

Solver	License	CNS	DNLP	LP	MCP	MINLP	MIP	MIQCP	MPEC	NLP	QCP	RMINLP	RMIP	RMIQCP
AMPL	Demo	-	-	-	-	-	-	-	-	-	-	-	-	-
BARON	Demo		▪	▪		▪	▪	▪		▪	▪		▪	▪
BDMLP	Demo			X			X							
BENCH	Demo	-		-	-	-	-		-	-	-	-		
CoinCbc	Demo			▪			▪							
CoinGlpk	Demo			▪			▪							
CONOPT	Demo			▪						X	▪			
CONVERT								-			-		-	-
CPLEX								▪			▪		▪	▪
DEA													▪	
DECISC	Demo			-										
DECISM	Demo			-										
DICOPT	Demo					X								
EXAMINER	Demo		-	-	-		-							

LP - Linear Programming  
linear economic model  
and linear constraints

MIP - Mixed Integer Programming  
nonlinear economic model and  
nonlinear constraints with  
continuous and integer variable

NLP – Nonlin  
nonlinear eco  
nonlinear con

**13 types of optimization problems**

**LP - Linear Programming**  
linear economic model  
and linear constraints

**NLP – Nonlinear Programming**  
nonlinear economic model and  
nonlinear constraints

**MIP - Mixed Integer Programming**  
nonlinear economic model and  
nonlinear constraints with  
continuous and integer variables

# GAMS Solvers

Options

EditorExecuteOutputSolversLicensesColorsFile ExtensionsExecute2

32 Solvers

ResetLegend

Solver	License	CNS	DNLP	LP	MCP	MINLP	MIP	MIQCP	MPEC	NLP	QCP	RMINLP	RMIP	RMIQCP
AMPL	Demo	-	-	-	-	-	-		-	-		-	-	
BARON	Demo		▪	▪		▪	▪	▪		▪	▪	▪	▪	▪
BDMLP	Demo			X			X						▪	

new global optimizer

DICOPT	Demo					X								
EXAMINER	Demo		-	-	-		-	-	-	-	-	-	-	-
GAMSBAS	Demo		-	-	-	-	-			-		-	-	
GAMSCHK	Demo		-	-	-	-	-			-		-	-	
KNITRO	Demo		▪	▪						▪	▪	▪	▪	▪
LGO	Demo		▪	▪						▪	▪	▪	▪	▪
LINGO	Demo		-											
MILES	Demo													
MINOS	Demo		▪	▪						▪	X	X	X	X

DICOPT One of several MINLP optimizers

MINOS a sophisticated NLP optimizer developed at Stanford OR Dept uses GRG and SLP

# Mathematical Basis for Optimization is the Kuhn Tucker Necessary Conditions

General Statement of a Mathematical Programming Problem

Minimize:  $y(x)$

Subject to:  $f_i(x) \leq 0$  for  $i = 1, 2, \dots, h$

$f_i(x) = 0$  for  $i = h+1, \dots, m$

$y(x)$  and  $f_i(x)$  are twice continuously differentiable real valued functions.



# Kuhn Tucker Necessary Conditions

## Lagrange Function

– converts constrained problem to an unconstrained one

$$L(x, \lambda) = y(x) + \sum_{i=1}^h \lambda_i [f_i(x) + x_{n+i}^2] + \sum_{i=1}^m \lambda_i f_i(x)$$

$\lambda_i$  are the Lagrange multipliers

$x_{n+i}$  are the slack variables used to convert the inequality constraints to equalities.

# Kuhn Tucker Necessary Conditions

Necessary conditions for a relative minimum at  $\mathbf{x}^*$

$$1. \quad \frac{\partial y(\mathbf{x}^*)}{\partial x_j} + \sum_{i=1}^h \lambda_i \frac{\partial f_i(\mathbf{x}^*)}{\partial x_j} + \sum_{i=h+1}^m \lambda_i \frac{\partial f_i(\mathbf{x}^*)}{\partial x_j} = 0 \quad \text{for } j = 1, 2, \dots, n$$

$$2. \quad f_i(\mathbf{x}^*) = 0 \quad \text{for } i = 1, 2, \dots, h$$

$$3. \quad f_i(\mathbf{x}^*) = 0 \quad \text{for } i = h+1, \dots, m$$

$$4. \quad \lambda_i f_i(\mathbf{x}^*) = 0 \quad \text{for } i = 1, 2, \dots, h$$

$$5. \quad \lambda_i \geq 0 \quad \text{for } i = 1, 2, \dots, h$$

$$6. \quad \lambda_i \text{ is unrestricted in sign} \quad \text{for } i = h+1, \dots, m$$

# Lagrange Multipliers

Treated as an:

- **Undetermined multiplier** – multiply constraints by  $\lambda_i$  and add to  $y(\mathbf{x})$
- **Variable** -  $L(\mathbf{x}, \lambda)$
- **Constant** – numerical value computed at the optimum

# Lagrange Multipliers

optimize:  $y(x_1, x_2)$   
subject to:  $f(x_1, x_2) = 0$


$$dy = \frac{\partial y}{\partial x_1} dx_1 + \frac{\partial y}{\partial x_2} dx_2 \quad \leftarrow \frac{\partial f}{\partial x_1}$$
$$0 = \frac{\partial f}{\partial x_1} dx_1 + \frac{\partial f}{\partial x_2} dx_2 \quad \longrightarrow \quad dx_2 = -\frac{\frac{\partial f}{\partial x_1}}{\frac{\partial f}{\partial x_2}} dx_1$$

## Lagrange Multipliers

$$dy = \frac{\partial y}{\partial x_1} dx_1 - \frac{\partial y}{\partial x_2} \frac{\frac{\partial f}{\partial x_1}}{\frac{\partial f}{\partial x_2}} dx_1$$

Rearrange the partial derivatives in the second term

# Lagrange Multipliers
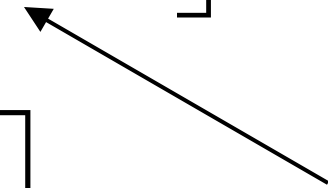
$$dy = \left[ \frac{\partial y}{\partial x_1} + \left( \frac{-\frac{\partial y}{\partial x_2}}{\frac{\partial f}{\partial x_2}} \right) \frac{\partial f}{\partial x_1} \right] dx_1$$

$$dy = \left[ \frac{\partial y}{\partial x_1} + \lambda \frac{\partial f}{\partial x_1} \right] dx_1 \quad ( ) = \lambda$$

Call the ratio of partial derivatives in the ( ) a Lagrange multiplier,  $\lambda$   
Lagrange multipliers are a ratio of partial derivatives at the optimum.

# Lagrange Multipliers

$$dy = \frac{\partial(y + \lambda f)}{\partial x_1} dx_1 = 0$$

Define  $L = y + \lambda f$  , an unconstrained function

$$\frac{\partial L}{\partial x_1} = 0 \quad \text{and by the same procedure} \quad \frac{\partial L}{\partial x_2} = 0$$

**Interpret  $L$  as an unconstrained function, and the partial derivatives set equal to zero are the necessary conditions for this unconstrained function**

# Lagrange Multipliers

Optimize:  $y(x_1, x_2)$

Subject to:  $f(x_1, x_2) = b$

Manipulations give:


$$\frac{\partial y}{\partial b} = -\lambda$$

Extends to:

$$\frac{\partial y}{\partial b_i} = -\lambda_i \quad \text{shadow price (\$ per unit of } b_i)$$



# Geometric Representation of an LP Problem

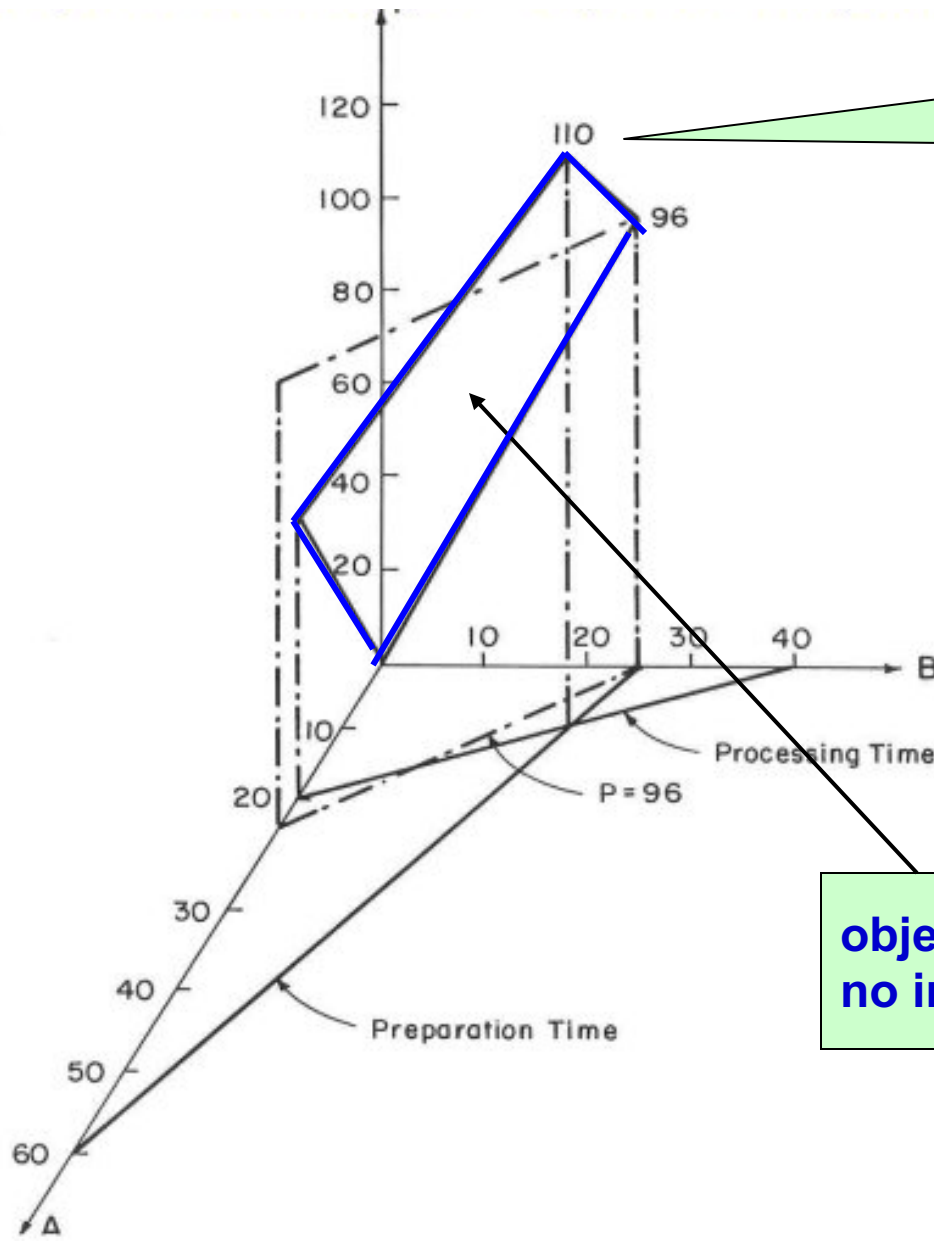

**Maximum at vertex**

$$P = 110$$

$$A = 10, B = 20$$

$$\text{max: } 3A + 4B = P$$

$$\text{s.t. } 4A + 2B \leq 80$$

$$2A + 5B \leq 120$$

**objective function is a plane  
no interior optimum**

# LP Example

Maximize:

$$x_1 + 2x_2 = P$$

Subject to:

$$2x_1 + x_2 + x_3 = 10$$

$$x_1 + x_2 + x_4 = 6$$

$$-x_1 + x_2 + x_5 = 2$$

$$-2x_1 + x_2 + x_6 = 1$$

4 equations and 6 unknowns, set 2 of the  $x_i = 0$  and solve for 4 of the  $x_i$ .

Basic feasible solution:  $x_1 = 0, x_2 = 0, x_3 = 10, x_4 = 6, x_5 = 2, x_6 = 1$

Basic solution:  $x_1 = 0, x_2 = 6, x_3 = 4, x_4 = 0, x_5 = -4, x_6 = -5$

## Final Step in Simplex Algorithm

$$\text{Maximize:} \quad -3/2 x_4 - 1/2 x_5 \quad = P - 10 \quad P = 10$$

Subject to:

$$x_3 - 3/2 x_4 + 1/2 x_5 \quad = 2 \quad x_3 = 2$$

$$1/2 x_4 - 3/2 x_5 + x_6 \quad = 1 \quad x_6 = 1$$

$$x_1 \quad + 1/2 x_4 - 1/2 x_5 \quad = 2 \quad x_1 = 2$$

$$x_2 \quad + 1/2 x_4 + 1/2 x_5 \quad = 4 \quad x_2 = 4$$

$$x_4 = 0$$

$$x_5 = 0$$

Simplex algorithm exchanges variables that are zero with ones that are nonzero, one at a time to arrive at the maximum

# Lagrange Multiplier Formulation

Returning to the original problem

$$\text{Max: } (1+2\lambda_1 + \lambda_2 - \lambda_3 - 2\lambda_4) x_1$$

$$(2+\lambda_1 + \lambda_2 + \lambda_3 + \lambda_4)x_2 +$$

$$\lambda_1 x_3 + \lambda_2 x_4 + \lambda_3 x_5 + \lambda_4 x_6$$

$$- (10\lambda_1 + 6\lambda_2 + 2\lambda_3 + \lambda_4) = L = P$$

Set partial derivatives with respect to  $x_1$ ,  $x_2$ ,  $x_3$ , and  $x_6$  equal to zero ( $x_4$  and  $x_5$  are zero) and solve resulting equations for the Lagrange multipliers

# Lagrange Multiplier Interpretation

$$(1+2\lambda_1 + \lambda_2 - \lambda_3 - 2\lambda_4)=0$$

$$(2+\lambda_1 + \lambda_2 + \lambda_3 + \lambda_4)=0$$

$$\lambda_2=-3/2$$

$$\lambda_3=-1/2$$

$$\lambda_4=0$$

$$\lambda_1=0$$

Maximize:  $0x_1 + 0x_2 + 0x_3 - 3/2 x_4 - 1/2 x_5 + 0x_6 = P - 10 \quad P = 10$

Subject to:

$$x_3 - 3/2 x_4 + 1/2 x_5 = 2 \quad x_3 = 2$$

$$1/2 x_4 - 3/2 x_5 + x_6 = 1 \quad x_6 = 1$$

$$x_1 + 1/2 x_4 - 1/2 x_5 = 2 \quad x_1 = 2$$

$$x_2 + 1/2 x_4 + 1/2 x_5 = 4 \quad x_2 = 4$$

$$x_4 = 0$$

$$x_5 = 0$$

$$-(10\lambda_1 + 6\lambda_2 + 2\lambda_3 + \lambda_4) = L = P = 10$$

The final step in the simplex algorithm is used to evaluate the Lagrange multipliers. It is the same as the result from analytical methods.

# General Statement of the Linear Programming Problem

*Objective Function:*

$$\text{Maximize: } c_1x_1 + c_2x_2 + \dots + c_nx_n = p \quad (4-1a)$$

*Constraint Equations:*

$$\text{Subject to: } a_{11}x_1 + a_{12}x_2 + \dots + a_{1n}x_n \leq b_1 \quad (4-1b)$$

$$a_{21}x_1 + a_{22}x_2 + \dots + a_{2n}x_n \leq b_2$$

$$\dots \quad \dots \quad \dots$$

$$\dots \quad \dots \quad \dots$$

$$a_{m1}x_1 + a_{m2}x_2 + \dots + a_{mn}x_n \leq b_m$$

$$x_j \geq 0 \quad \text{for } j = 1, 2, \dots, n \quad (4-1c)$$

# LP Problem with Lagrange Multiplier Formulation

Multiply each constraint equation, (4-1b), by the Lagrange multiplier  $\lambda_i$  and add to the objective function

Have  $x_1$  to  $x_m$  be values of the variables in the basis, positive numbers

Have  $x_{m+1}$  to  $x_n$  be values of the variables that are not in the basis and are zero.

$$\begin{aligned}
 & \left[ c_1 + \sum_{i=1}^m a_{i1} \lambda_i \right] x_1 + \left[ c_2 + \sum_{i=1}^m a_{i2} \lambda_i \right] x_2 + \left[ c_m + \sum_{i=1}^m a_{im} \lambda_i \right] x_m + \dots \\
 & + \left[ c_{m+1} + \sum_{i=1}^m a_{im+1} \lambda_i \right] x_{m+1} + \left[ c_n + \sum_{i=1}^m a_{in} \lambda_i \right] x_n = p + \sum_{i=1}^m b_i \lambda_i
 \end{aligned}$$

Annotations:

- equal to zero from  $\partial p / \partial x_m = 0$  (points to the  $x_m$  term in the first row)
- positive in the basis (points to the  $x_m$  term in the first row)
- not equal to zero, negative (points to the  $x_{m+1}$  term in the second row)
- equal to zero not in basis (points to the  $x_n$  term in the second row)

Left hand side = 0 and  $p = - \sum b_i \lambda_i$

# Sensitivity Analysis

- Use the results from the final step in the simplex method to determine the range on the variables in the basis where the optimal solution remains optimal for changes in:
- $b_i$  availability of raw materials demand for product, capacities of the process units
- $c_j$  sales price and costs
- See Optimization for Engineering Systems book for equations at [www.mpri.lsu.edu](http://www.mpri.lsu.edu)



# Nonlinear Programming

Three standard methods – all use the same information

Successive Linear Programming


Successive Quadratic Programming

Generalized Reduced Gradient Method

Optimize:  $y(\mathbf{x})$                        $\mathbf{x} = (x_1, x_2, \dots, x_n)$   
Subject to:  $f_i(\mathbf{x}) = 0$                       for  $i = 1, 2, \dots, m$      $n > m$

$\frac{\partial y(\mathbf{x}_k)}{\partial x_j}$                        $\frac{\partial f_i(\mathbf{x}_k)}{\partial x_j}$  evaluate partial derivatives at  $\mathbf{x}_k$

# Generalized Reduced Gradient Direction

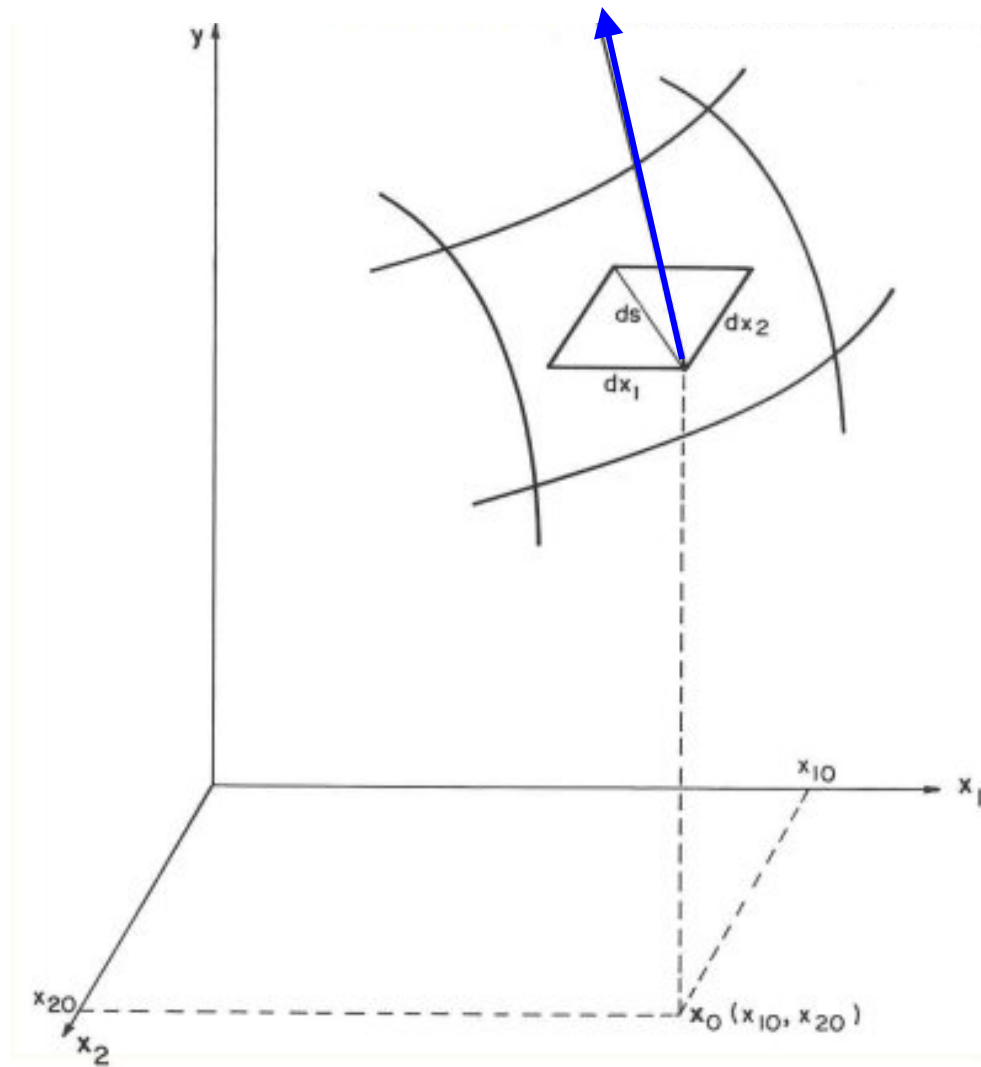

$$x_{nb} = x_{k,nb} + \alpha \nabla Y(x_k)$$

# Generalized Reduced Gradient Algorithm

Minimize:  $y(x) = \mathbf{y}(\mathbf{x})$   $\mathbf{Y}[\mathbf{x}_{k,nb} + \alpha \nabla Y(\mathbf{x}_k)] = Y(\alpha)$

Subject to:  $f_i(x) = 0$

$(\mathbf{x}) = (\mathbf{x}_b, \mathbf{x}_{nb})$  *m basic variables, (n-m) nonbasic variables*

## Reduced Gradient

$$\nabla^T Y(\mathbf{x}_k) = \nabla^T y_{nb}(\mathbf{x}_k) - \nabla y_b(\mathbf{x}_k) B_b^{-1} B_{nb}$$


## Reduced Gradient Line

$$\mathbf{x}_{nb} = \mathbf{x}_{k,nb} + \alpha \nabla Y(\mathbf{x}_k) \quad B = \frac{\partial f_i(\mathbf{x}_k)}{\partial \mathbf{x}_j}$$

## Newton Raphson Algorithm

$$\mathbf{x}_{i+1,b} = \mathbf{x}_{i,b} - B_b^{-1} f(\mathbf{x}_{i,b}, \mathbf{x}_{nb})$$

# Generalized Reduced Gradient Trajectory

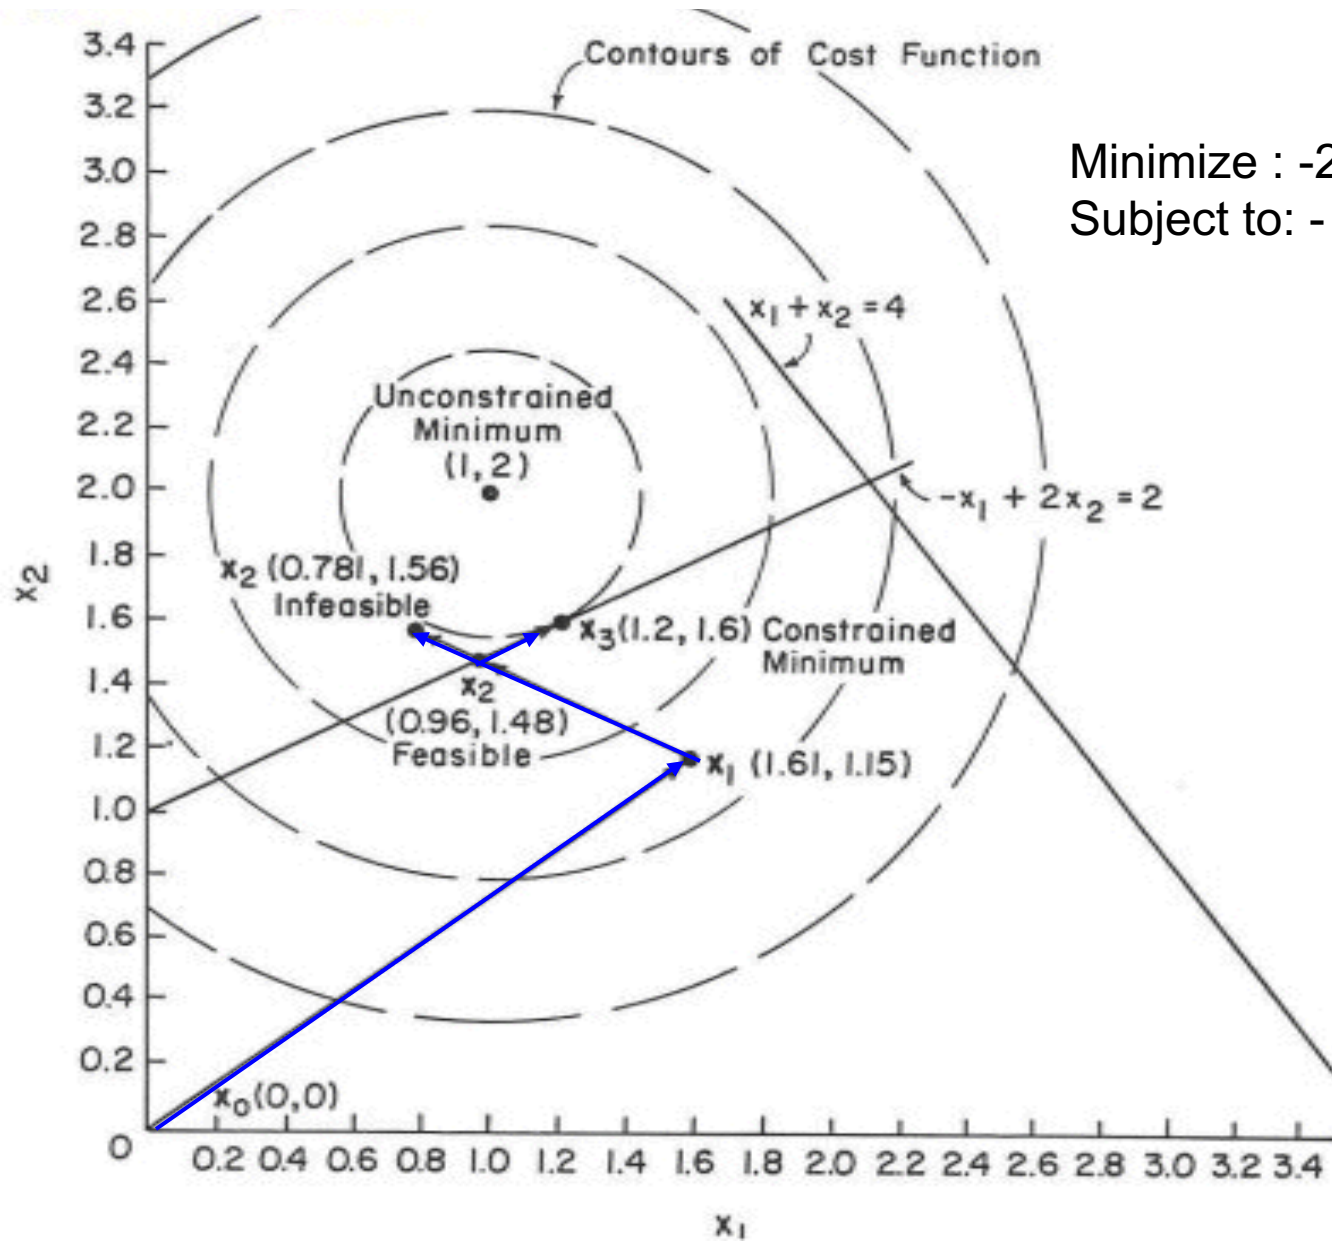


Minimize :  $-2x_1 - 4x_2 + x_1^2 + x_2^2 + 5$   
 Subject to:  $-x_1 + 2x_2 \leq 2$   
 $x_1 + x_2 \leq 4$

# On-Line Optimization

- Automatically adjust operating conditions with the plant's distributed control system
- Maintains operations at optimal set points
- Requires the solution of three NLP's in sequence
  - gross error detection and data reconciliation
  - parameter estimation
  - economic optimization

## BENEFITS

- Improves plant profit by 10%
- Waste generation and energy use are reduced
- Increased understanding of plant operations

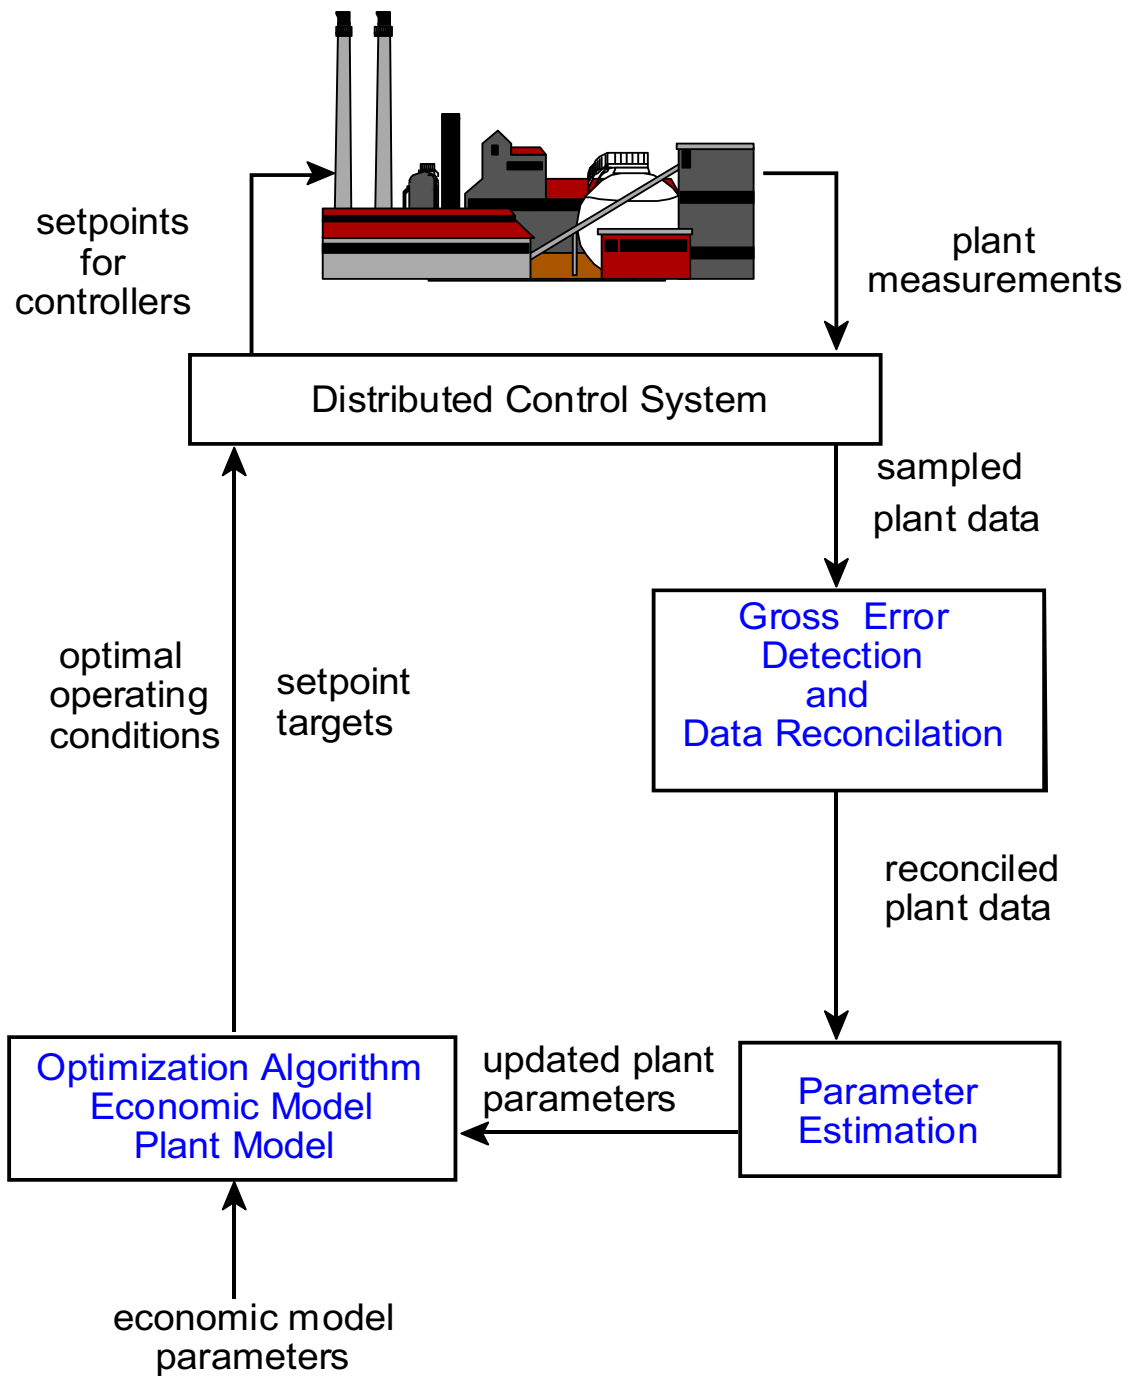

# Some Companies Using On-Line Optimization

## United States

Texaco

Amoco

Conoco

Lyondel

Sunoco

Phillips

Marathon

Dow

Chevron

Pyrotec/KTI

NOVA Chemicals (Canada)

British Petroleum

## Europe

OMV Deutschland

Dow Benelux

Shell

OEMV

Penex

Borealis AB

DSM-Hydrocarbons

## **Applications**

mainly crude units in refineries and ethylene plants

## Companies Providing On-Line Optimization

Aspen Technology - Aspen Plus On-Line

- DMC Corporation
- Setpoint
- Hyprotech Ltd.

Simulation Science - ROM

- Shell - Romeo

Profimatics - On-Opt

- Honeywell

Litwin Process Automation - FACS

DOT Products, Inc. - NOVA



## Distributed Control System

Runs control algorithm three times a second

Tags - contain about 20 values for each measurement, e.g. set point, limits, alarm

Refinery and large chemical plants have 5,000 - 10,000 tags

## Data Historian

Stores instantaneous values of measurements for each tag every five seconds or as specified.

Includes a relational data base for laboratory and other measurements not from the DCS

Values are stored for one year, and require hundreds of megabites

Information made available over a LAN in various forms, e.g. averages, Excel files.

# Key Elements

Gross Error Detection

Data Reconciliation

Parameter Estimation

Economic Model  
(Profit Function)

Plant Model  
(Process Simulation)

Optimization Algorithm

# DATA RECONCILIATION

Adjust process data to satisfy material and energy balances.

Measurement error - **e**

$$\mathbf{e} = \mathbf{y} - \mathbf{x}$$


**y** = measured process variables

**x** = true values of the measured variables

$$\tilde{\mathbf{x}} = \mathbf{y} + \mathbf{a}$$

**a** - measurement adjustment

# Data Reconciliation

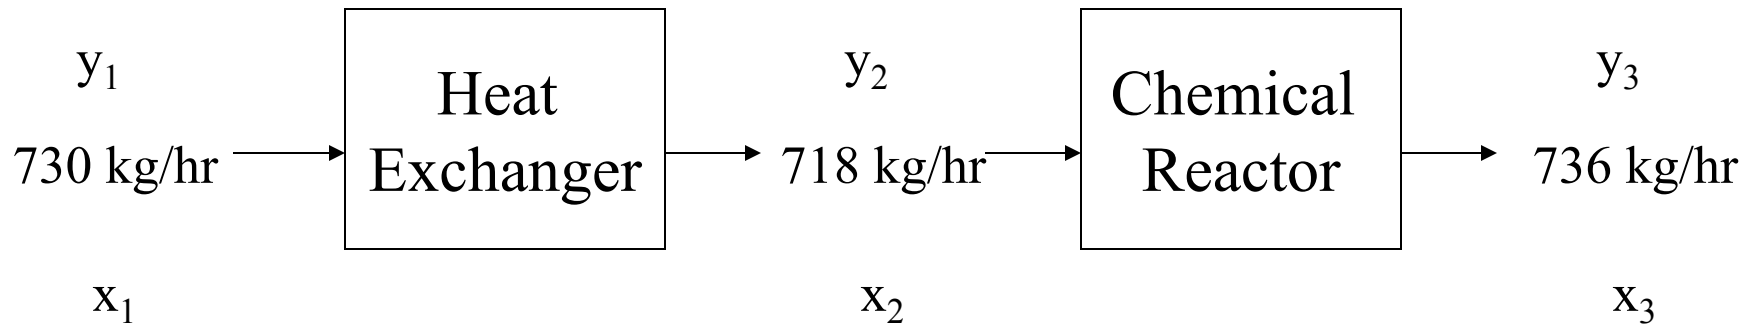

Material Balance

$$x_1 = x_2$$


$$x_1 - x_2 = 0$$

Steady State

$$x_2 = x_3$$

$$x_2 - x_3 = 0$$

# Data Reconciliation

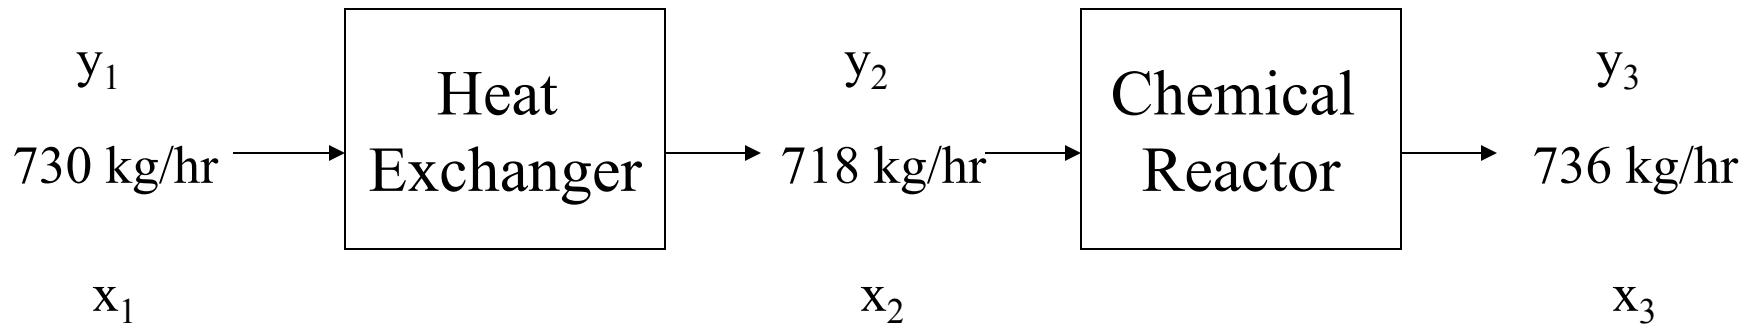

$$\begin{bmatrix} 1 & -1 & 0 \\ 0 & 1 & -1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix}$$

$$Ax = 0$$

# Data Reconciliation using Least Squares

$$\min_x : \sum_{i=1}^n \left( \frac{y_i - x_i}{\sigma_i} \right)^2$$

Subject to:  $Ax = 0$        $Q =$   
 $\text{diag}[\text{factory}_i]$

Analytical solution using LaGrange Multipliers

$$\hat{x} = y - QA^T (AQA^T)^{-1} Ay$$

$$\hat{x} = [728 \quad 728 \quad 728]^T$$

# Data Reconciliation

Measurements having only random errors - least squares

$$\underset{x}{\text{Minimize:}} \sum_{i=1}^n \left( \frac{y_i - x_i}{\sigma_i} \right)^2$$


$$\text{Subject to: } f(x) = 0$$

$f(x)$  - process model

- linear or nonlinear

$\sigma_i$  = standard deviation of  $y_i$

# Types of Gross Errors

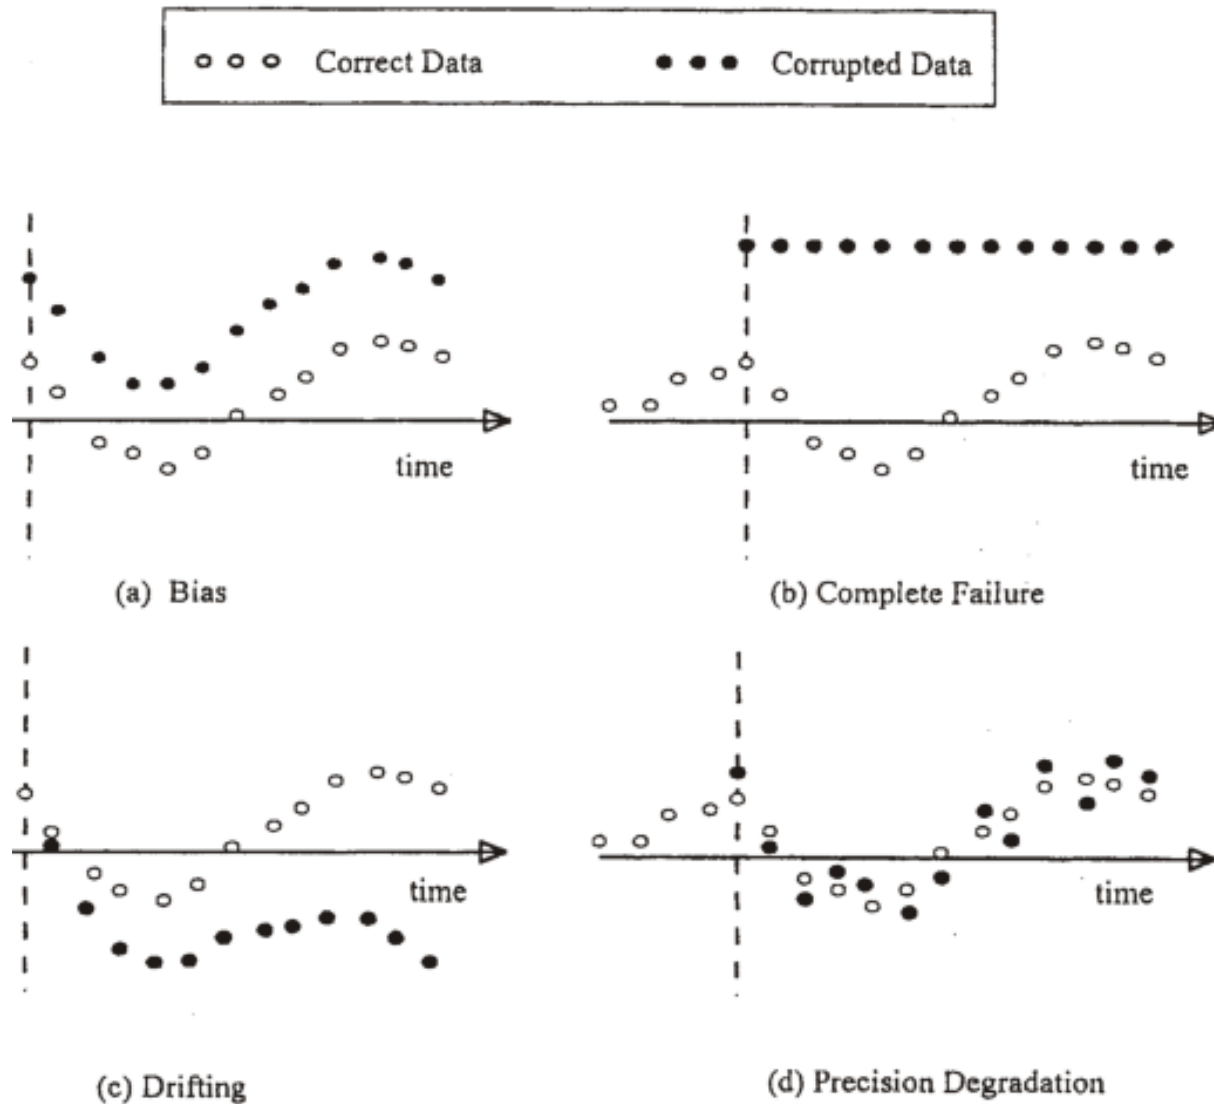

Source: S. Narasimhan and C. Jordache, *Data Reconciliation and Gross Error Detection*, Gulf Publishing Company, Houston, TX (2000)



# Combined Gross Error Detection and Data Reconciliation

Measurement Test Method - least squares

$$\text{Minimize:} \quad (\mathbf{y} - \mathbf{x})^T \mathbf{Q}^{-1} (\mathbf{y} - \mathbf{x}) = \mathbf{e}^T \mathbf{Q}^{-1} \mathbf{e}$$

$\mathbf{x}, \mathbf{z}$

$$\text{Subject to:} \quad \mathbf{f}(\mathbf{x}, \mathbf{z}, \quad) = 0$$

$$\mathbf{x}^L \leq \mathbf{x} \leq \mathbf{x}^U$$

$$\mathbf{z}^L \leq \mathbf{z} \leq \mathbf{z}^U$$

Test statistic:

if  $|e_i| = |y_i - x_i| / \sigma_i \geq C$  measurement contains a gross error

Least squares is based on only random errors being present  
Gross errors cause numerical difficulties

Need methods that are not sensitive to gross errors

# Methods Insensitive to Gross Errors

## Tjao-Biegler's Contaminated Gaussian Distribution

$$P(y_i \mid x_i) = (1-\eta)P(y_i \mid x_i, R) + \eta P(y_i \mid x_i, G)$$

$P(y_i \mid x_i, R)$  = probability distribution function for the random error

$P(y_i \mid x_i, G)$  = probability distribution function for the gross error.

Gross error occur with probability  $\eta$

### Gross Error Distribution Function

$$P(y \mid x, G) = \frac{1}{\sqrt{2\pi}b\sigma} e^{-\frac{(y-x)^2}{2b^2\sigma^2}}$$

# Tjao-Biegler Method

Maximizing this distribution function of measurement errors or minimizing the negative logarithm subject to the constraints in plant model, i.e.,

$$\text{Minimize: } \mathbf{x} \quad \left\{ \ln \left[ \left( 1 + \frac{(y_i - x_i)^2}{2b^2} \right) e^{-\frac{(y_i - x_i)^2}{2b^2}} \right] \ln \left[ \sqrt{2} \right] \right\}$$

Subject to:  $\mathbf{f}(\mathbf{x}) = 0$  plant model  
 $\mathbf{x}^L \leq \mathbf{x} \leq \mathbf{x}^U$  bounds on the process variables

A NLP, and values are needed for  $\mathbf{x}^L$  and  $\mathbf{x}^U$  and  $b$

## Test for Gross Errors

If  $P(y_i - x_i, G) > (1 - \alpha)P(y_i - x_i, R)$ , gross error  
 probability of a gross error      probability of a random error

$$\frac{|y_i - x_i|}{b} > \sqrt{\frac{2b^2}{1 - \alpha} \ln \left[ \frac{b(1 - \alpha)}{b^2} \right]}$$

# Robust Function Methods

$$\begin{aligned} & \text{Minimize:} && - \sum_i [(y_i, x_i)] \\ & \mathbf{x} \\ & \text{Subject to:} && \mathbf{f}(\mathbf{x}) = 0 \\ & && \mathbf{x}^L \leq \mathbf{x} \leq \mathbf{x}^U \end{aligned}$$

Lorentzian distribution

$$f_i = \frac{1}{1 + \frac{1}{2} x_i^2}$$

Fair function

$$f_i(c) = c^2 \left[ \frac{i}{c} - \log \left( 1 + \frac{i}{c} \right) \right]$$

c is a tuning parameter

Test statistic

$$t_i = (y_i - x_i) / s_i$$

# Parameter Estimation Error-in-Variables Method

## Least squares

$$\text{Minimize: } (\mathbf{y} - \mathbf{x})^T \mathbf{W}^{-1} (\mathbf{y} - \mathbf{x}) = \mathbf{e}^T \mathbf{W}^{-1} \mathbf{e}$$

$$\text{Subject to: } \mathbf{f}(\mathbf{x}, \boldsymbol{\theta}) = 0$$

- plant parameters

## Simultaneous data reconciliation and parameter estimation

$$\text{Minimize: } (\mathbf{y} - \mathbf{x})^T \mathbf{W}^{-1} (\mathbf{y} - \mathbf{x}) = \mathbf{e}^T \mathbf{W}^{-1} \mathbf{e}$$

$\mathbf{x},$

$$\text{Subject to: } \mathbf{f}(\mathbf{x}, \boldsymbol{\theta}) = 0$$

another nonlinear programming problem

# Three Similar Optimization Problems

*Optimize:*        **Objective function**  
*Subject to:*    **Constraints are the plant**  
                     **model**


## Objective function

data reconciliation - distribution function  
parameter estimation - least squares  
economic optimization - profit function

## Constraint equations

material and energy balances  
chemical reaction rate equations  
thermodynamic equilibrium relations  
capacities of process units  
demand for product  
availability of raw materials

# Key Elements of On-Line Optimization

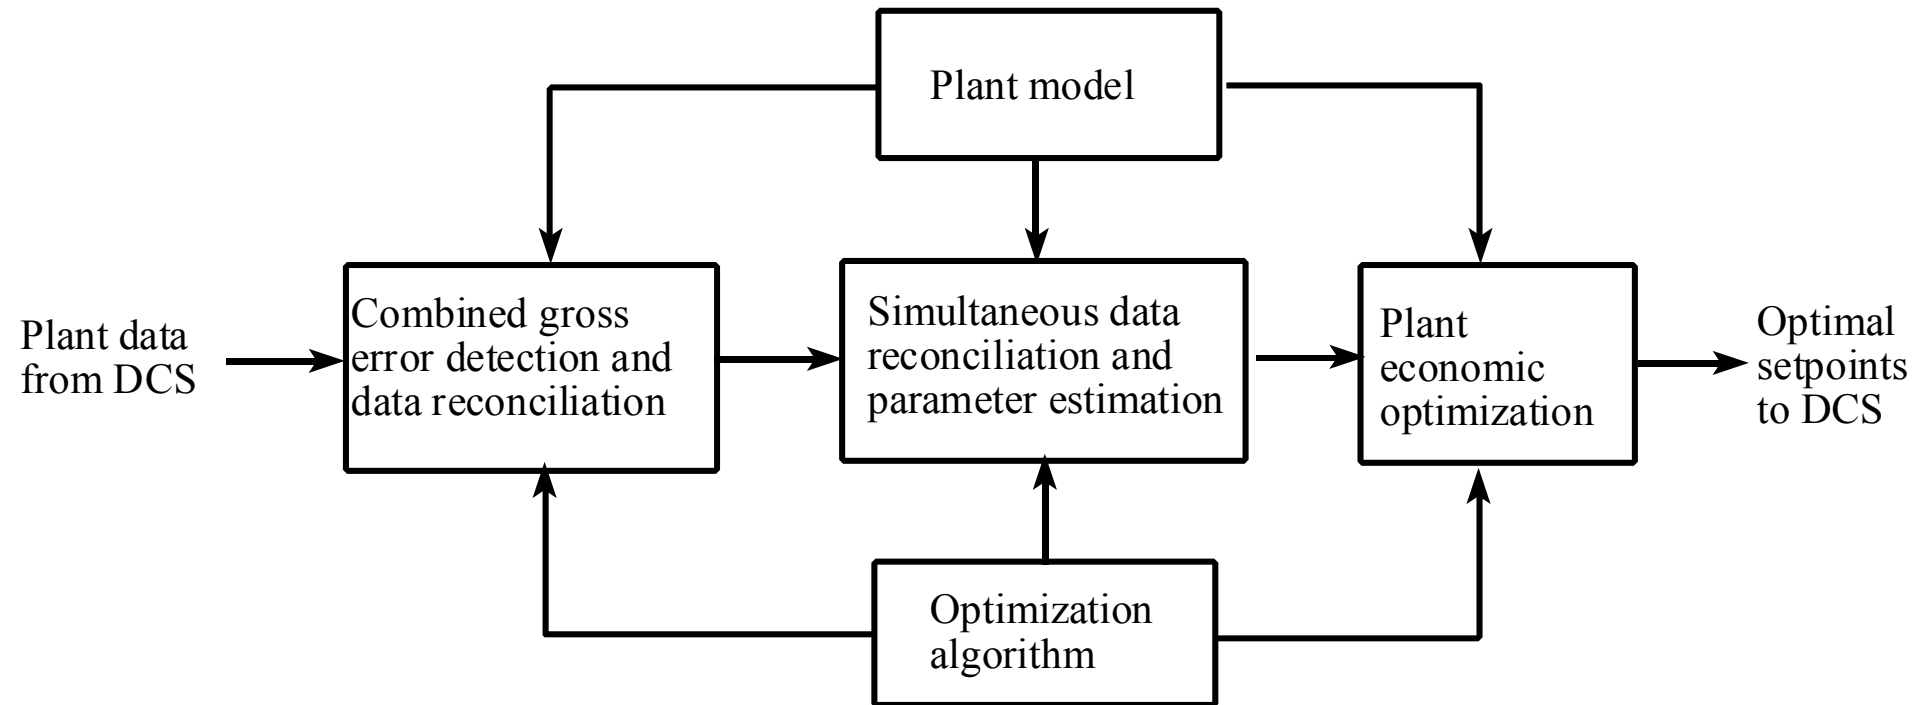

## Interactive On-Line Optimization Program

1. Conduct combined gross error detection and data reconciliation to detect and rectify gross errors in plant data sampled from distributed control system using the Tjoa-Biegler's method (the contaminated Gaussian distribution) or robust method (Lorentzian distribution).

**This step generates a set of measurements containing only random errors for parameter estimation.**

2. Use this set of measurements for simultaneous parameter estimation and data reconciliation using the least squares method.

**This step provides the updated parameters in the plant model for economic optimization.**

3. Generate optimal set points for the distributed control system from the economic optimization using the updated plant and economic models.



# Interactive On-Line Optimization Program


Process and economic models are entered as equations in a form similar to Fortran

The program writes and runs three GAMS programs.

Results are presented in a summary form, on a process flowsheet and in the full GAMS output

The program and users manual (120 pages) can be downloaded from the LSU Minerals Processing Research Institute web site

URL <http://www.mpri.lsu.edu>

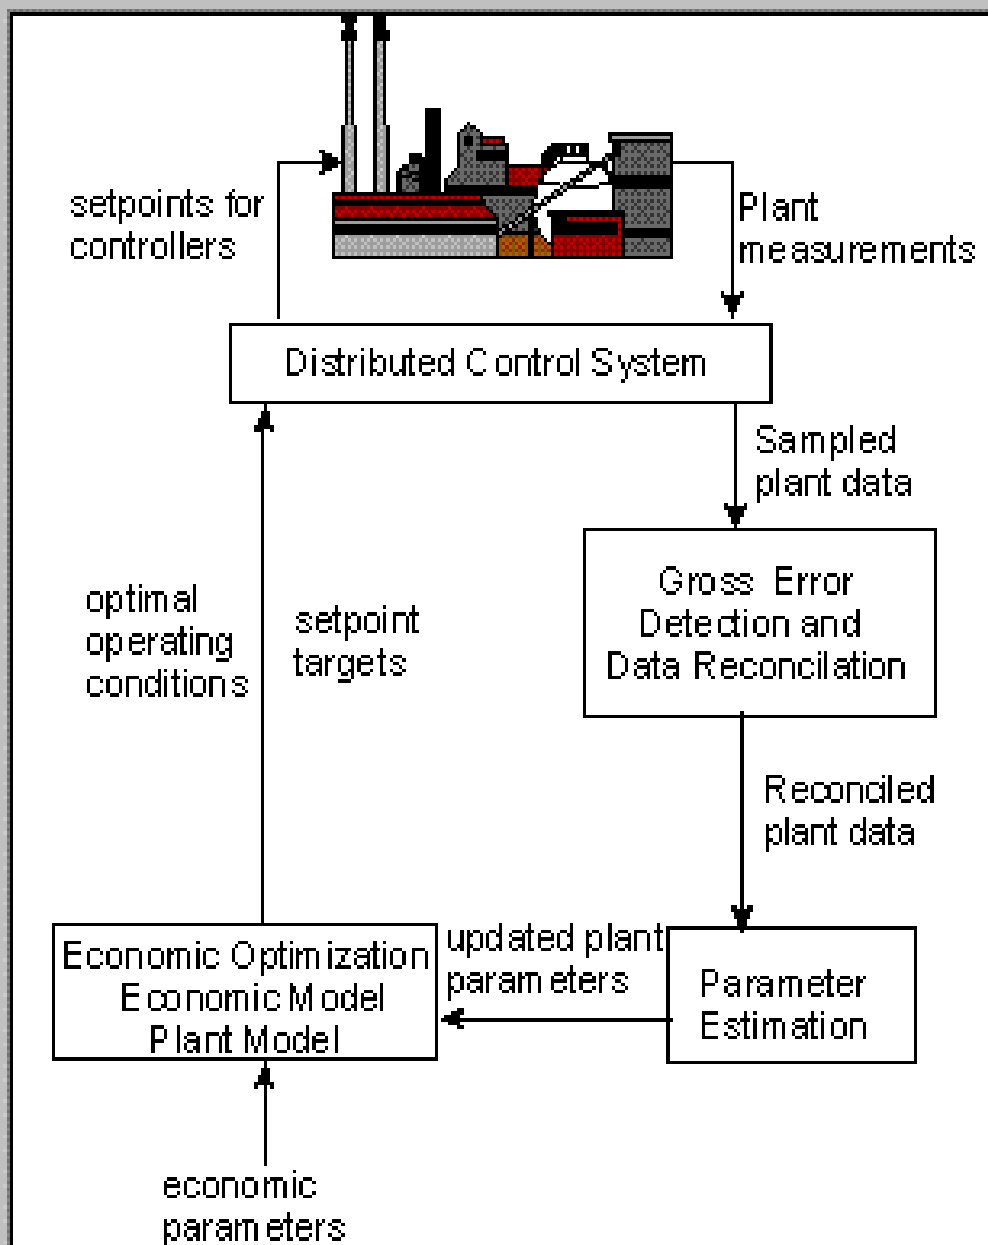

*On-line optimization adjusts the operation of a plant to maximize the profits and minimize the emissions by providing the optimal set points of the Distributed Control System (DCS).*

☐ **Create New Model.** Requires:

- a. Plant Model
- b. Economic Model
- c. Parameters
- d. DCS Data

☒ **Open Existing Model**

Revise Plant Information

OK


Cancel

Help

☐ Do not display this window next time


# Mosaic-Monsanto Sulfuric Acid Plant

3,200 tons per day of 93% Sulfuric Acid, Convent, Louisiana

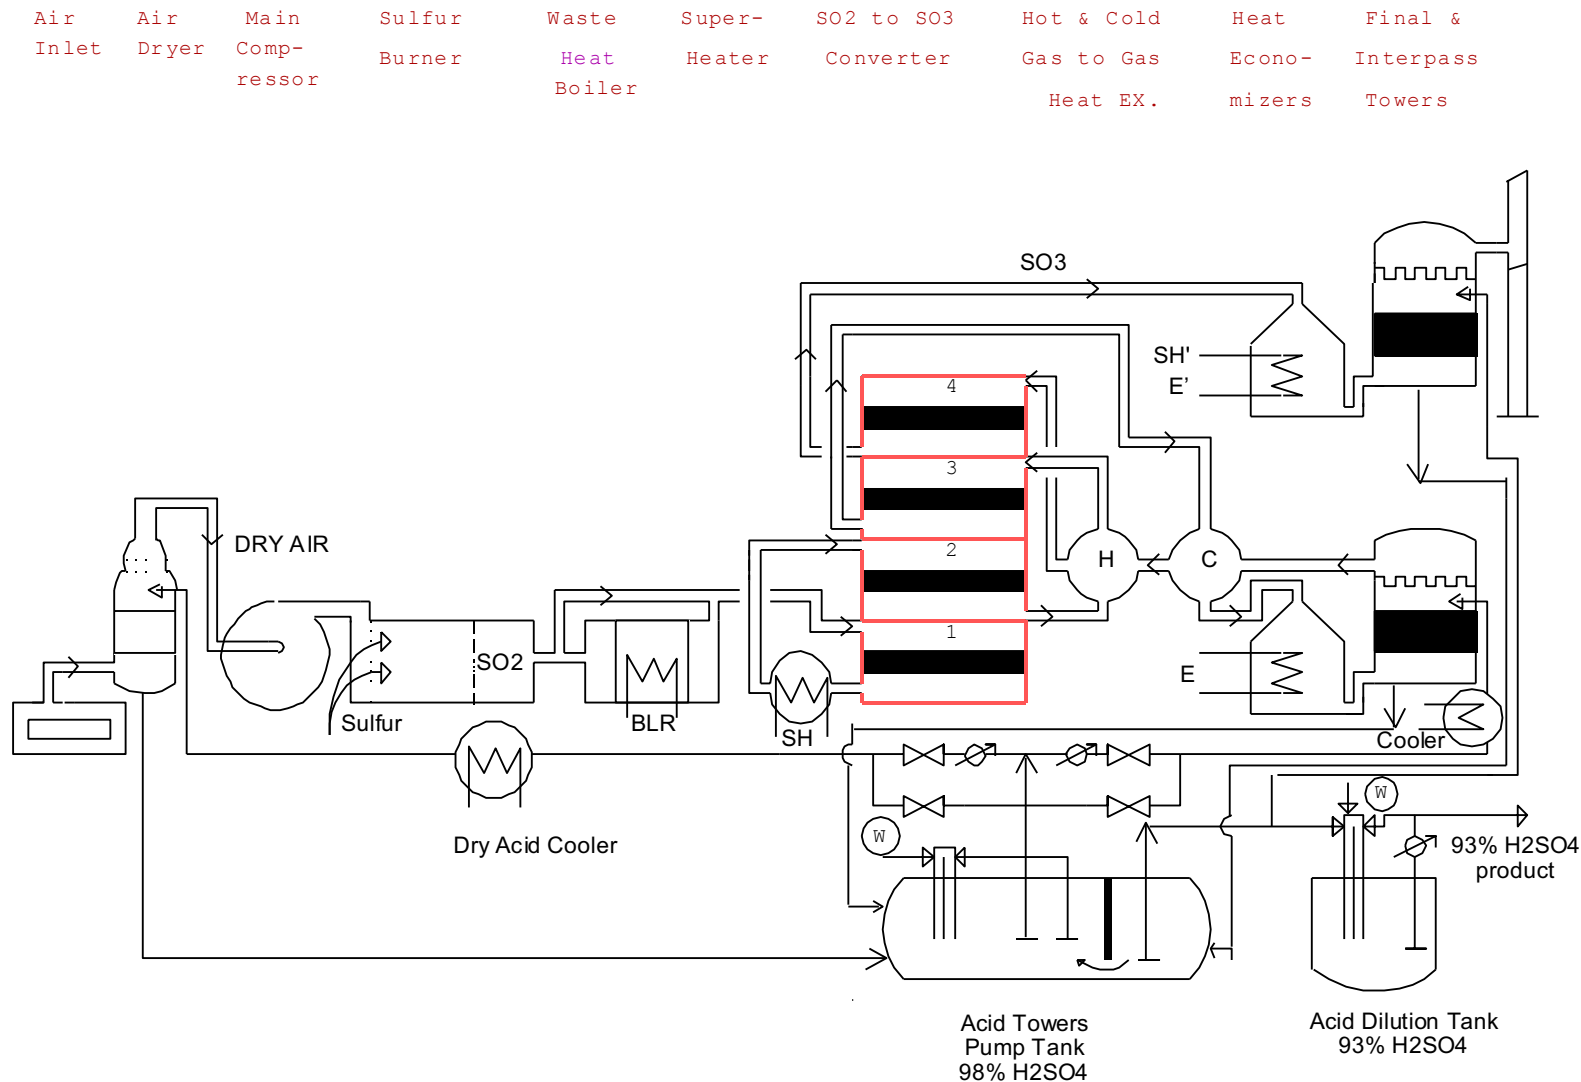


# Motiva Refinery Alkylation Plant

15,000 barrels per day, Convent, Louisiana, reactor section, 4 Stratco reactors

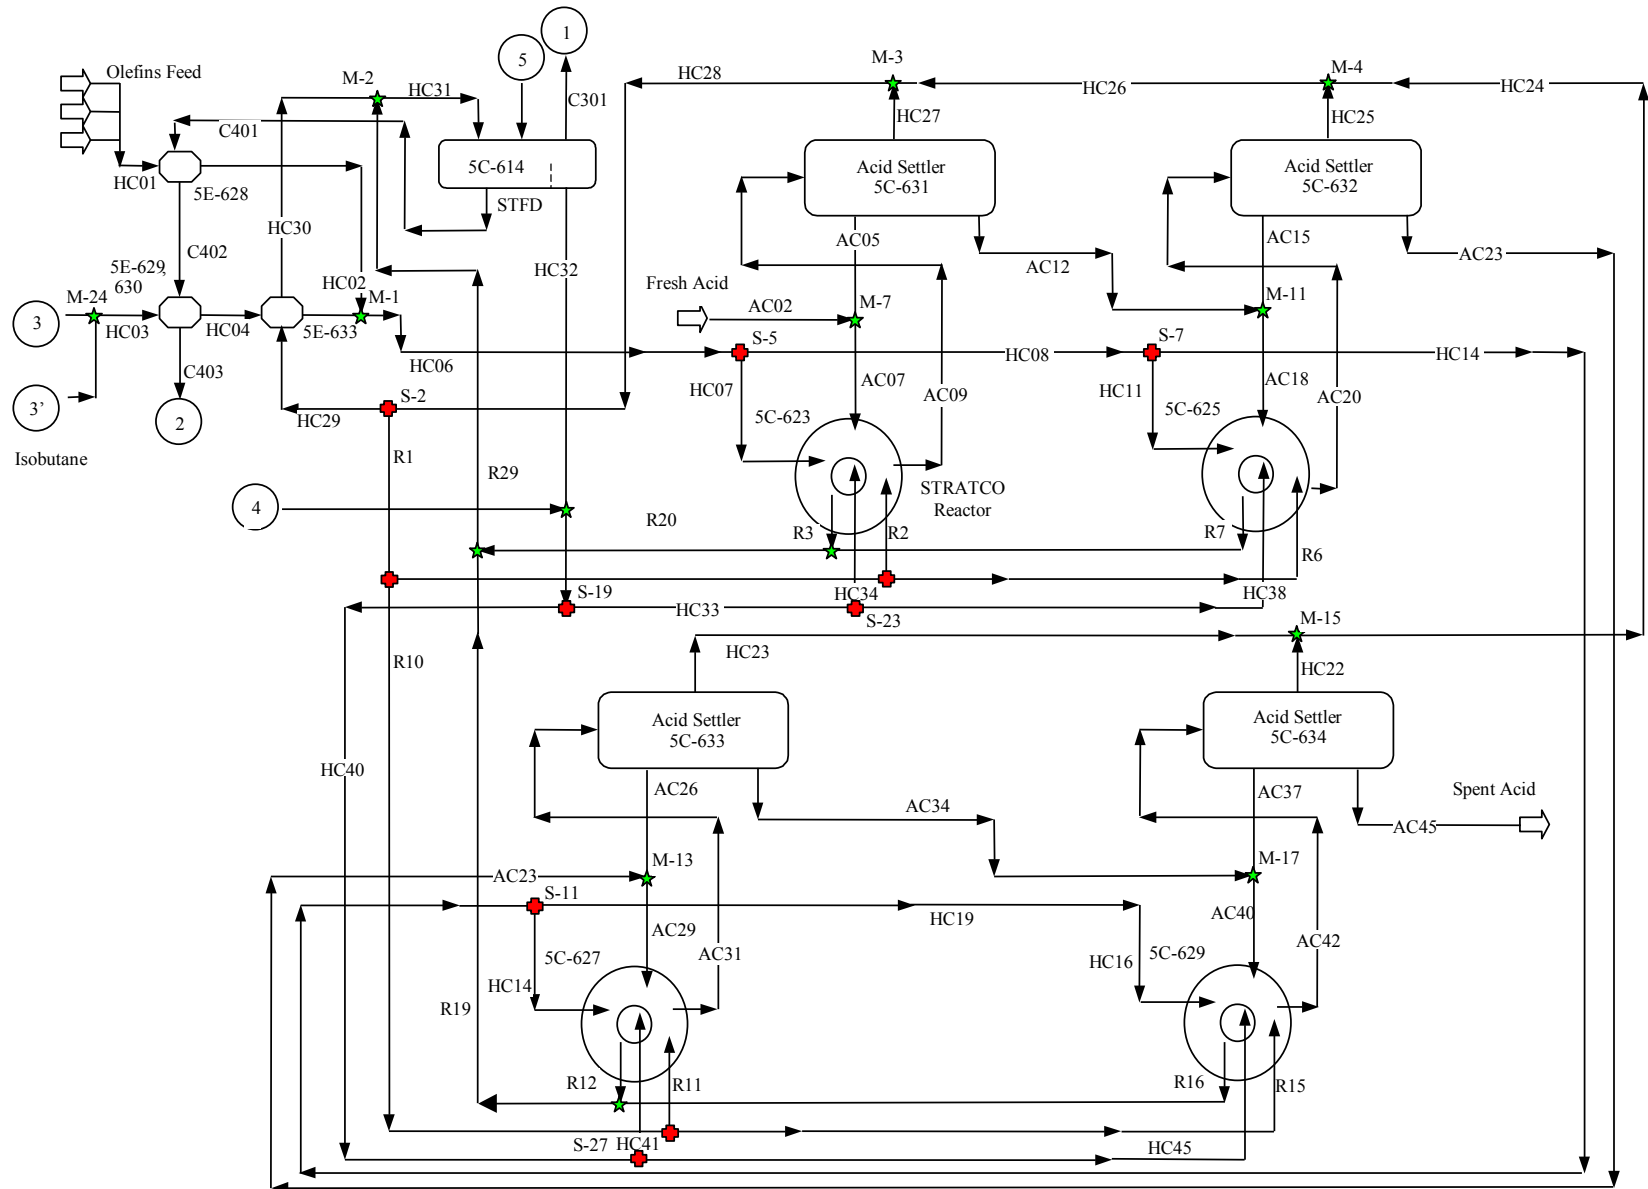


# Steady State Detection

Execution frequency must be greater than the plant settling time (time to return to steady state).

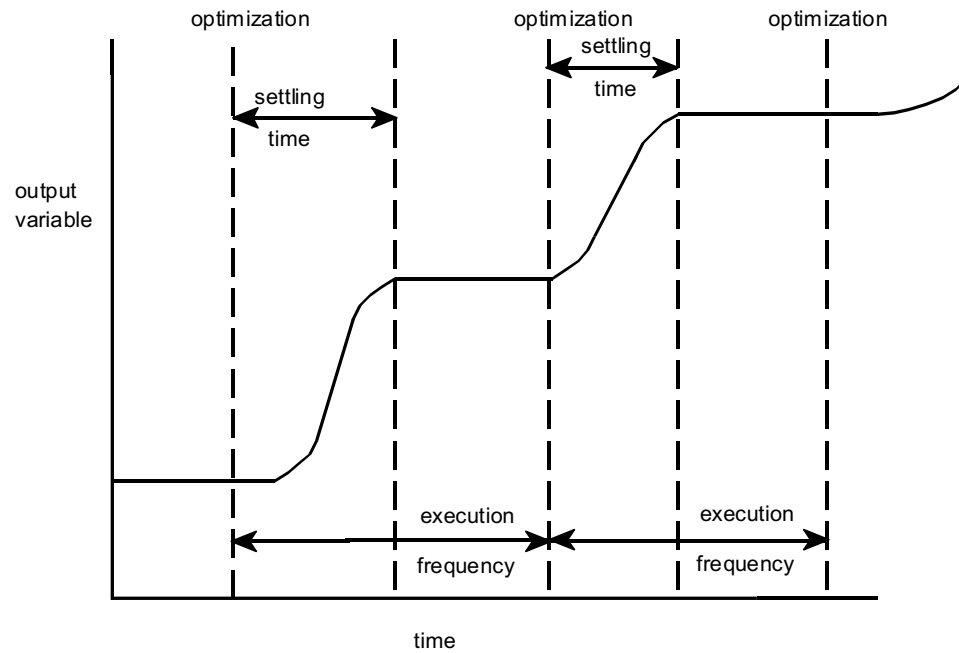

a. Time between optimizations is longer than settling time

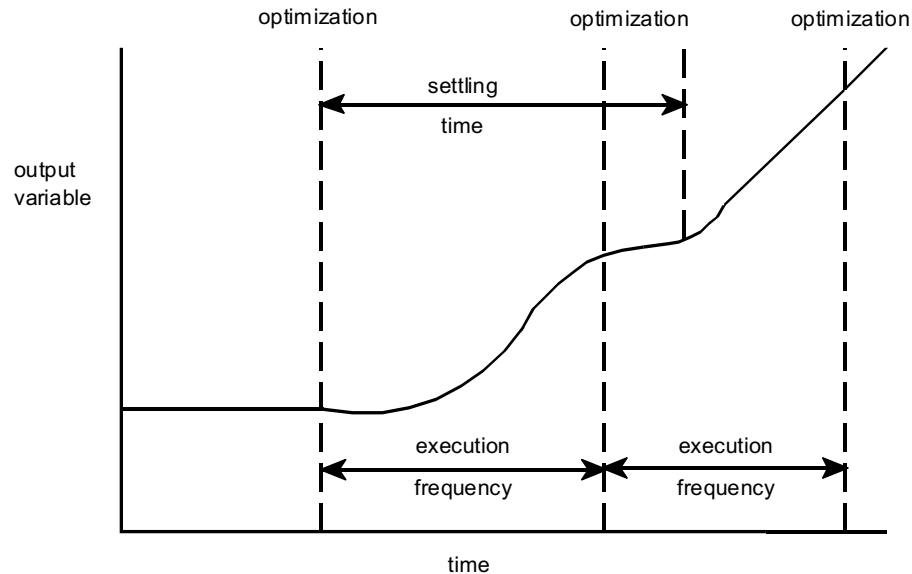


b. Time between optimizations is less than settling time

# On-Line Optimization - Distributed Control System Interface

Plant must at steady state when data extracted from DCS and when set points sent to DCS.

Plant models are steady state models.

Coordinator program

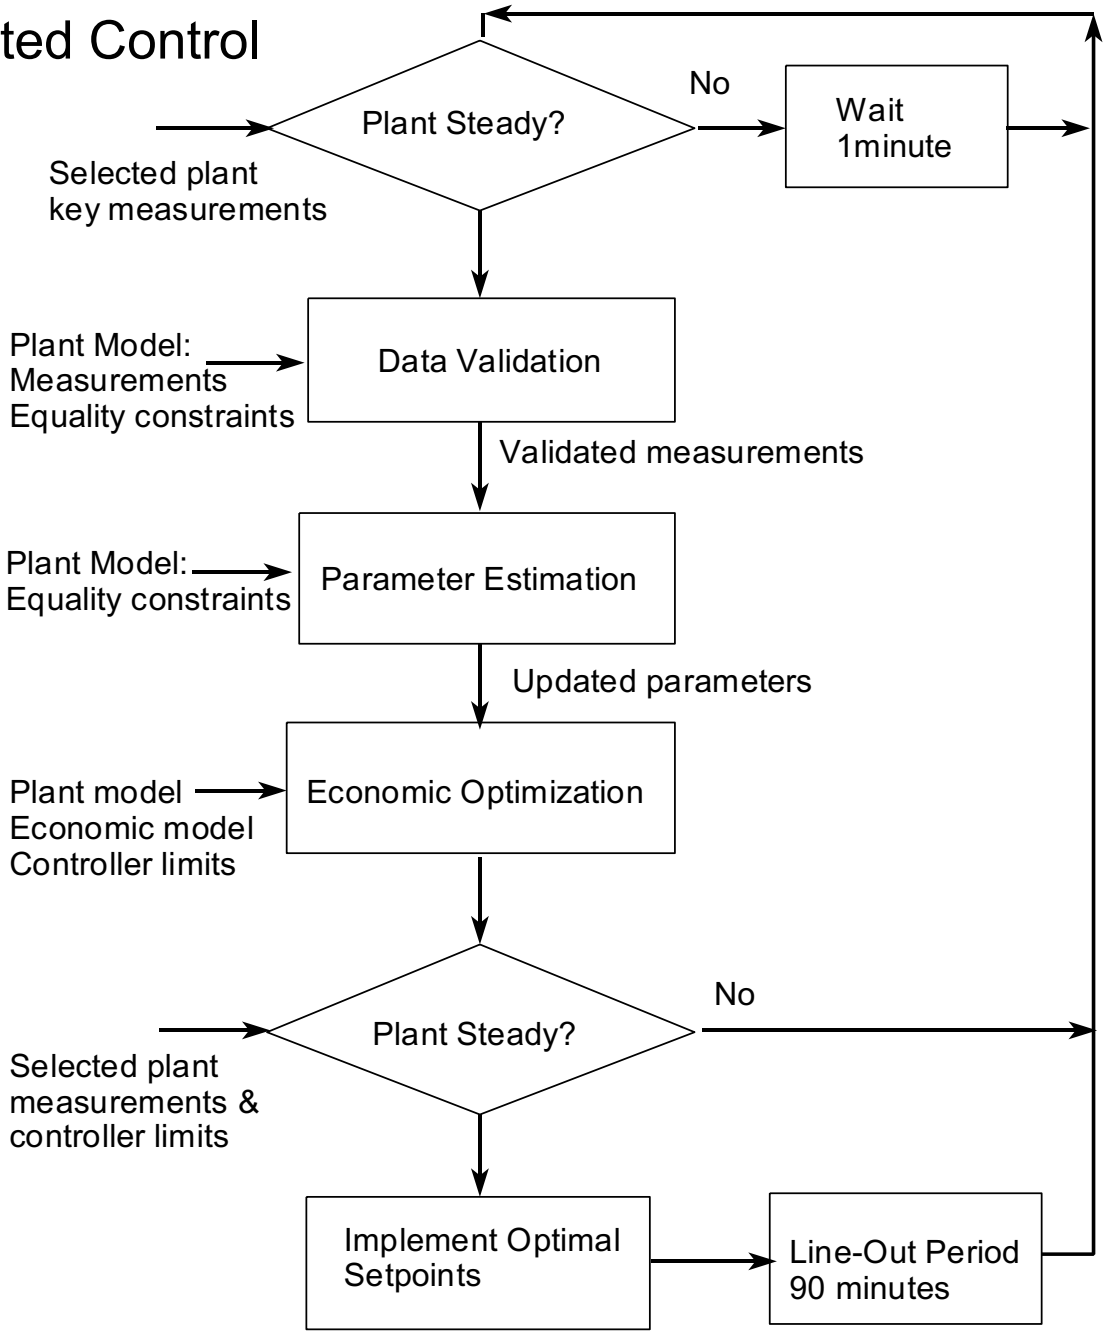

# Some Other Considerations

Redundancy

Observeability

Variance estimation

Closing the loop

Dynamic data reconciliation  
and parameter estimation

## Additional Observations

Most difficult part of on-line optimization is developing and validating the process and economic models.

Most valuable information obtained from on-line optimization is a more thorough understanding of the process



# Mixed Integer Programming

Numerous Applications

Batch Processing

Pinch Analysis


Optimal Flowsheet Structure

Branch and Bound Algorithm

Solves MILP

Used with NLP Algorithm to solve MINLP

# Mixed Integer Process Example

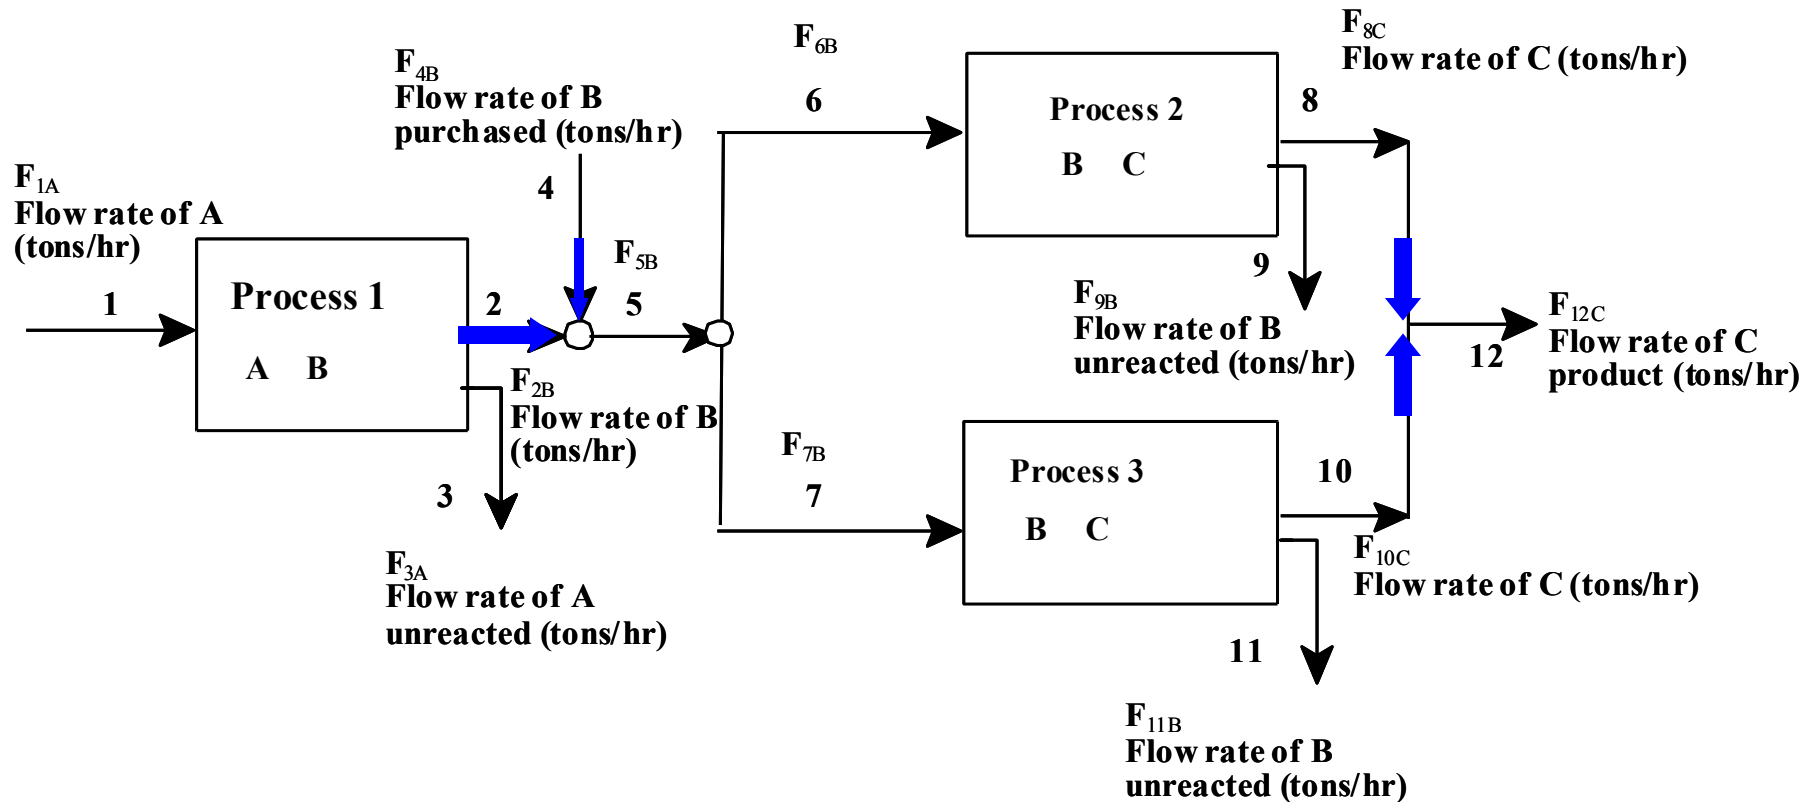

Produce C from either Process 2 or Process 3

Make B from A in Process 1 or purchase B

# Mixed Integer Process Example

operating cost

fixed cost

feed cost

sales

$$\text{max: } -250 F_1^A - 400 F_6^B - 550 F_7^B - 1,000 y_1 - 1,500 y_2 - 2,000 y_3 - 500 F_1^A - 950 F_4^B + 1,800 F_{12}^C$$

subject to: mass yields

$$-0.90 F_1^A + F_2^B = 0$$

$$-0.10 F_1^A + F_3^A = 0$$

$$-0.82 F_6^B + F_8^C = 0$$

$$-0.18 F_6^B + F_9^B = 0$$

$$-0.95 F_7^B + F_{10}^C = 0$$

$$-0.05 F_7^B + F_{11}^B = 0$$

node MB

$$F_2^B + F_4^B - F_5^B = 0$$

$$F_5^B = F_6^B - F_7^B = 0$$

$$F_8^C + F_{10}^C - F_{12}^C = 0$$

availability of A

$$F_1^A \leq 16 y_1 \quad \text{Availability of raw material A to make B}$$

availability of B

$$F_4^B \leq 20 y_4 \quad \text{Availability of purchased material B}$$

demand for C

$$F_8^C \leq 10 y_2 \quad \text{Demand for C from either Process 2,}$$

$$F_{10}^C \leq 10 y_3 \quad \text{stream } F_8^C \text{ or Process 3, stream } F_{10}^C$$

integer constraint

$$y_2 + y_3 = 1 \quad \text{Select either Process 1 or Purchase B}$$

$$y_1 + y_4 = 1 \quad \text{Select either Process 2 or 3}$$

Branch and bound algorithm used for optimization

# Branch and Bound Algorithm

## LP Relaxation Solution

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$P = 22.5$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$x_1 = 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_2 = 0$$

$x_1$  and  $x_2$  are integers  $\geq 0$

Branch on  $x_1$ , it is not an integer in the LP Relaxation Solution

Form two new problems by adding constraints  $x_1 \geq 5$  and  $x_1 \leq 4$

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_1 \geq 5$$

$$x_1 \leq 4$$

## Branch and Bound Algorithm

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_1 \geq 5$$

infeasible

no further evaluations required

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_1 \leq 4$$

LP solution  $P = 21.0$

$$x_1 = 4$$

$$x_2 = 0.5$$

branch on  $x_2$

Form two new problems by adding constraints  $x_2 \geq 1$  and  $x_2 \leq 0$

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_1 \leq 4$$

$$x_2 \geq 1$$

$$\text{Max: } 5x_1 + 2x_2 = P$$

$$\text{Subject to: } x_1 + x_2 \leq 4.5$$

$$-x_1 + 2x_2 \leq 6.0$$

$$x_1 \leq 4$$

$$x_2 \leq 0 = 0$$

# Branch and Bound Algorithm

$$\begin{array}{ll}\text{Max:} & 5x_1 + 2x_2 = P \\ \text{Subject to:} & x_1 + x_2 \leq 4.5 \\ & -x_1 + 2x_2 \leq 6.0 \\ & x_1 \leq 4 \\ & x_2 \geq 1\end{array}$$

$$P = 19.5$$

$$x_1 = 3.5$$

$$x_2 = 1$$

$$\begin{array}{ll}\text{Max:} & 5x_1 + 2x_2 = P \\ \text{Subject to:} & x_1 + x_2 \leq 4.5 \\ & -x_1 + 2x_2 \leq 6.0 \\ & x_1 \leq 4 \\ & x_2 \leq 0\end{array}$$


$$P = 20$$

$$x_1 = 4$$


$$x_2 = 0$$

optimal solution



# Branch and Bound Algorithm

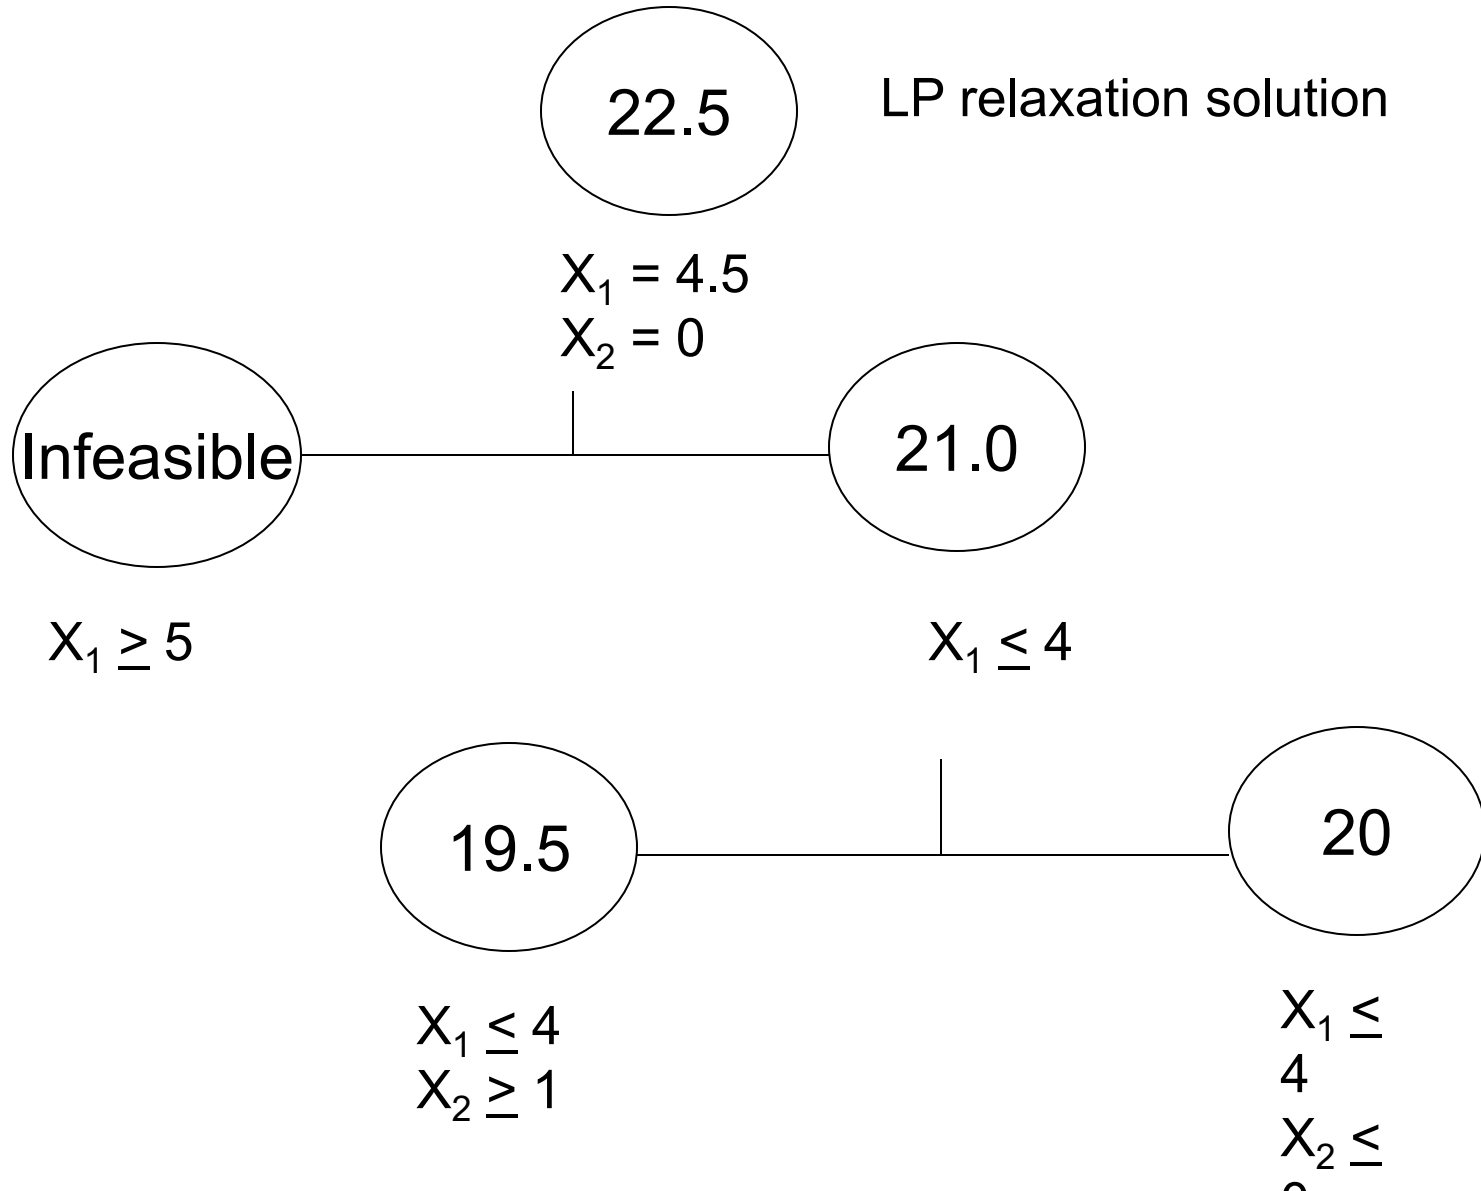

# Branch and Bound Algorithm

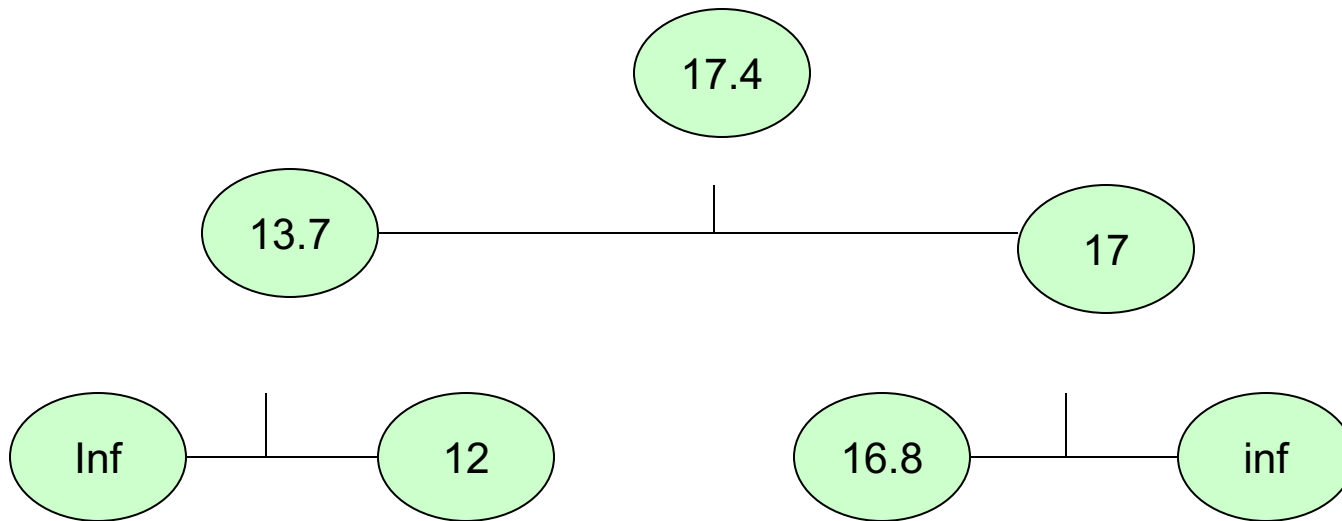


Integer solution

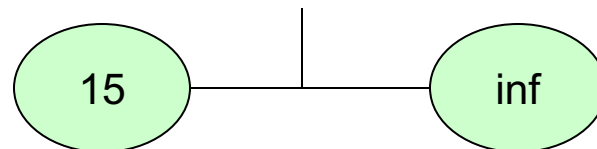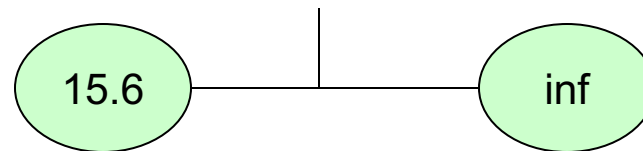

Integer solution –  
optimal solution



# Mixed Integer Nonlinear Programming

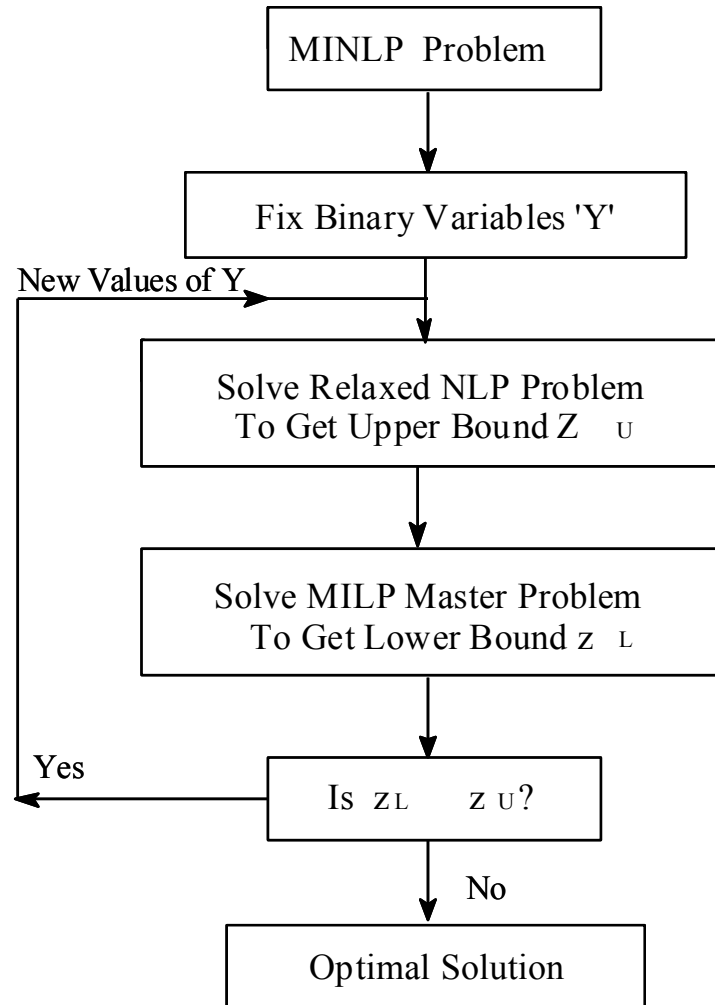

# Triple Bottom Line

Triple Bottom Line =

Product Sales

- Manufacturing Costs (raw materials, energy costs, others)
- Environmental Costs (compliance with environmental regulations)
- Sustainable Costs (repair damage from emissions within regulations)

Triple Bottom Line =

Profit (sales – manufacturing costs)

- Environmental Costs
- + Sustainable (Credits – Costs) (credits from reducing emissions)


**Sustainable costs** are costs to society from damage to the environment caused by emissions within regulations, e.g., sulfur dioxide 4.0 lb per ton of sulfuric acid produced.

**Sustainable development:** Concept that development should meet the needs of the present without sacrificing the ability of the future to meet its needs

# Optimization of Chemical Production Complexes

- Opportunity
  - New processes for conversion of surplus carbon dioxide to valuable products
- Methodology
  - Chemical Complex Analysis System
  - Application to chemical production complex in the lower Mississippi River corridor


# Plants in the lower Mississippi River Corridor

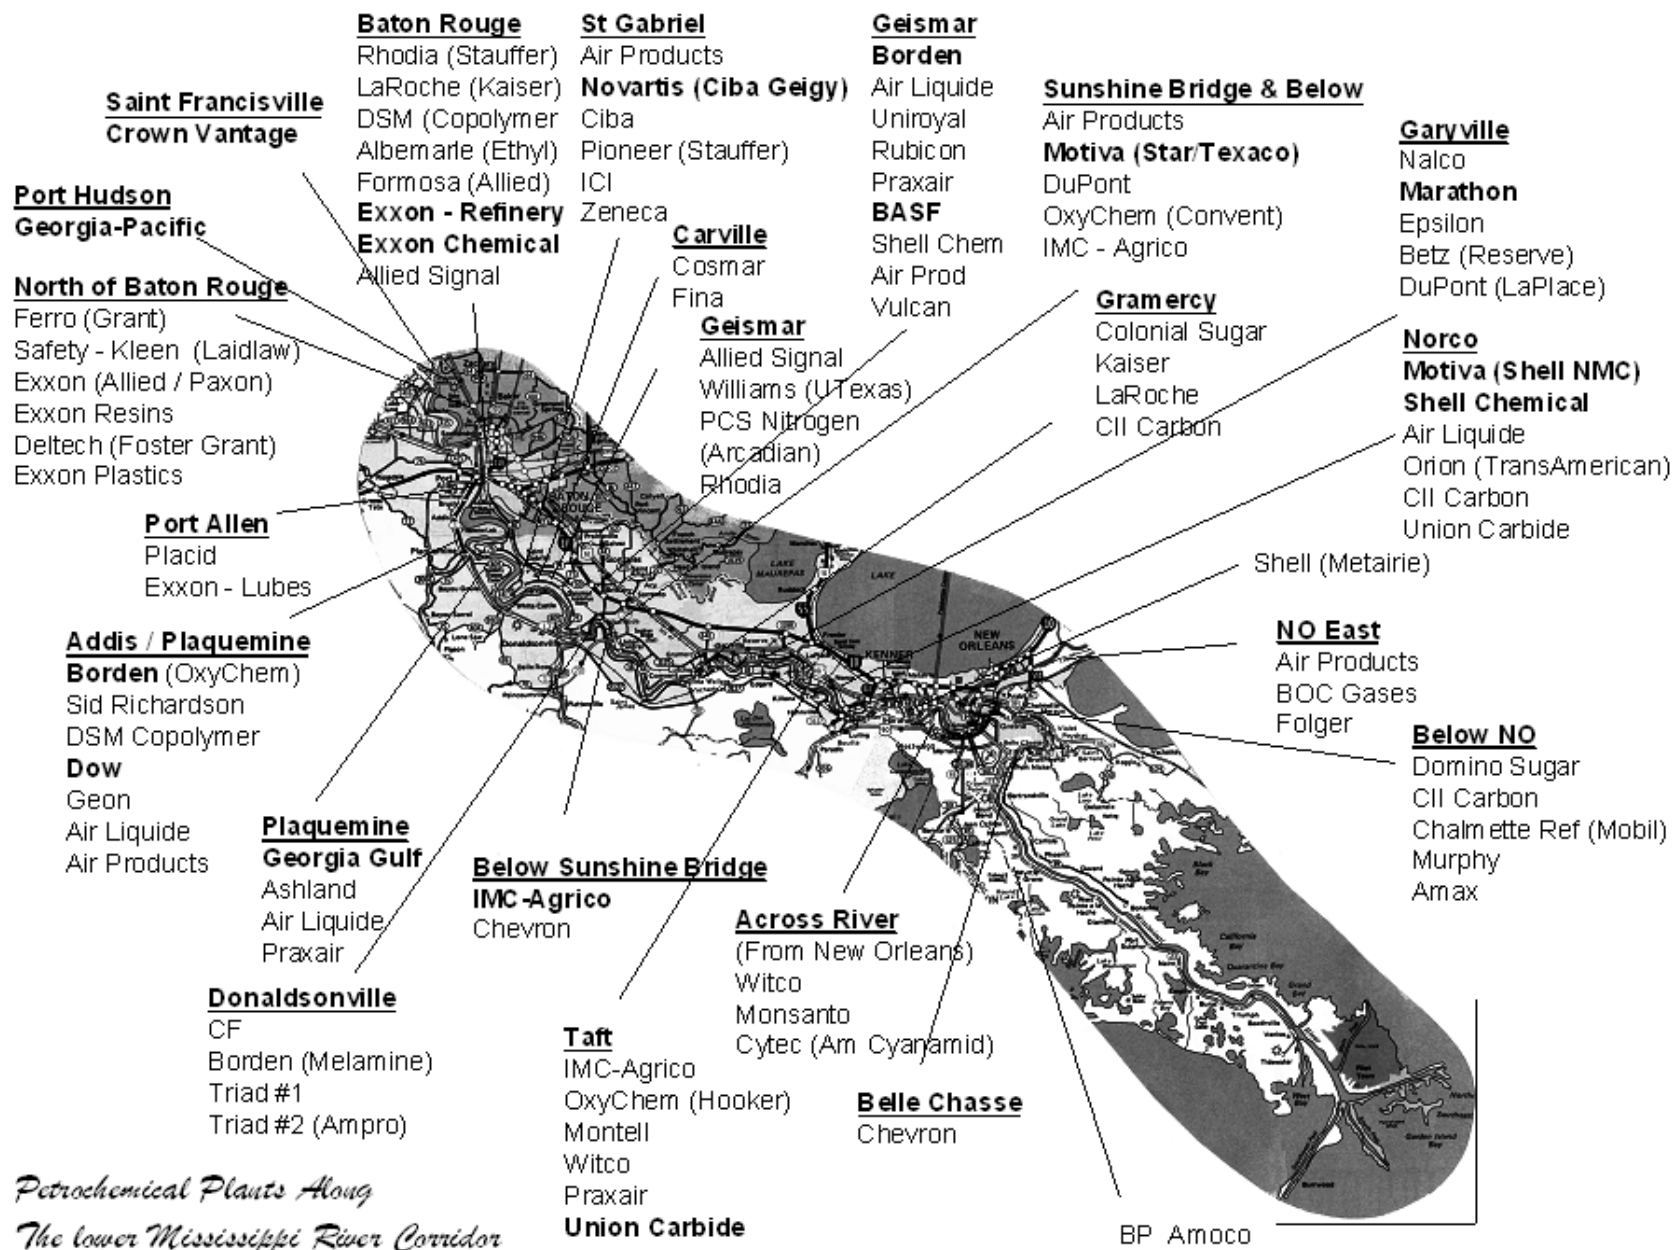

# Some Chemical Complexes in the World

- North America
  - Gulf coast petrochemical complex in Houston area
  - Chemical complex in the Lower Mississippi River Corridor
- South America
  - Petrochemical district of Camacari-Bahia (Brazil)
  - Petrochemical complex in Bahia Blanca (Argentina)
- Europe
  - Antwerp port area (Belgium)
  - BASF in Ludwigshafen (Germany)
- Oceania
  - Petrochemical complex at Altona (Australia)
  - Petrochemical complex at Botany (Australia)

# Plants in the lower Mississippi River Corridor, Base Case. Flow Rates in Million Tons Per Year

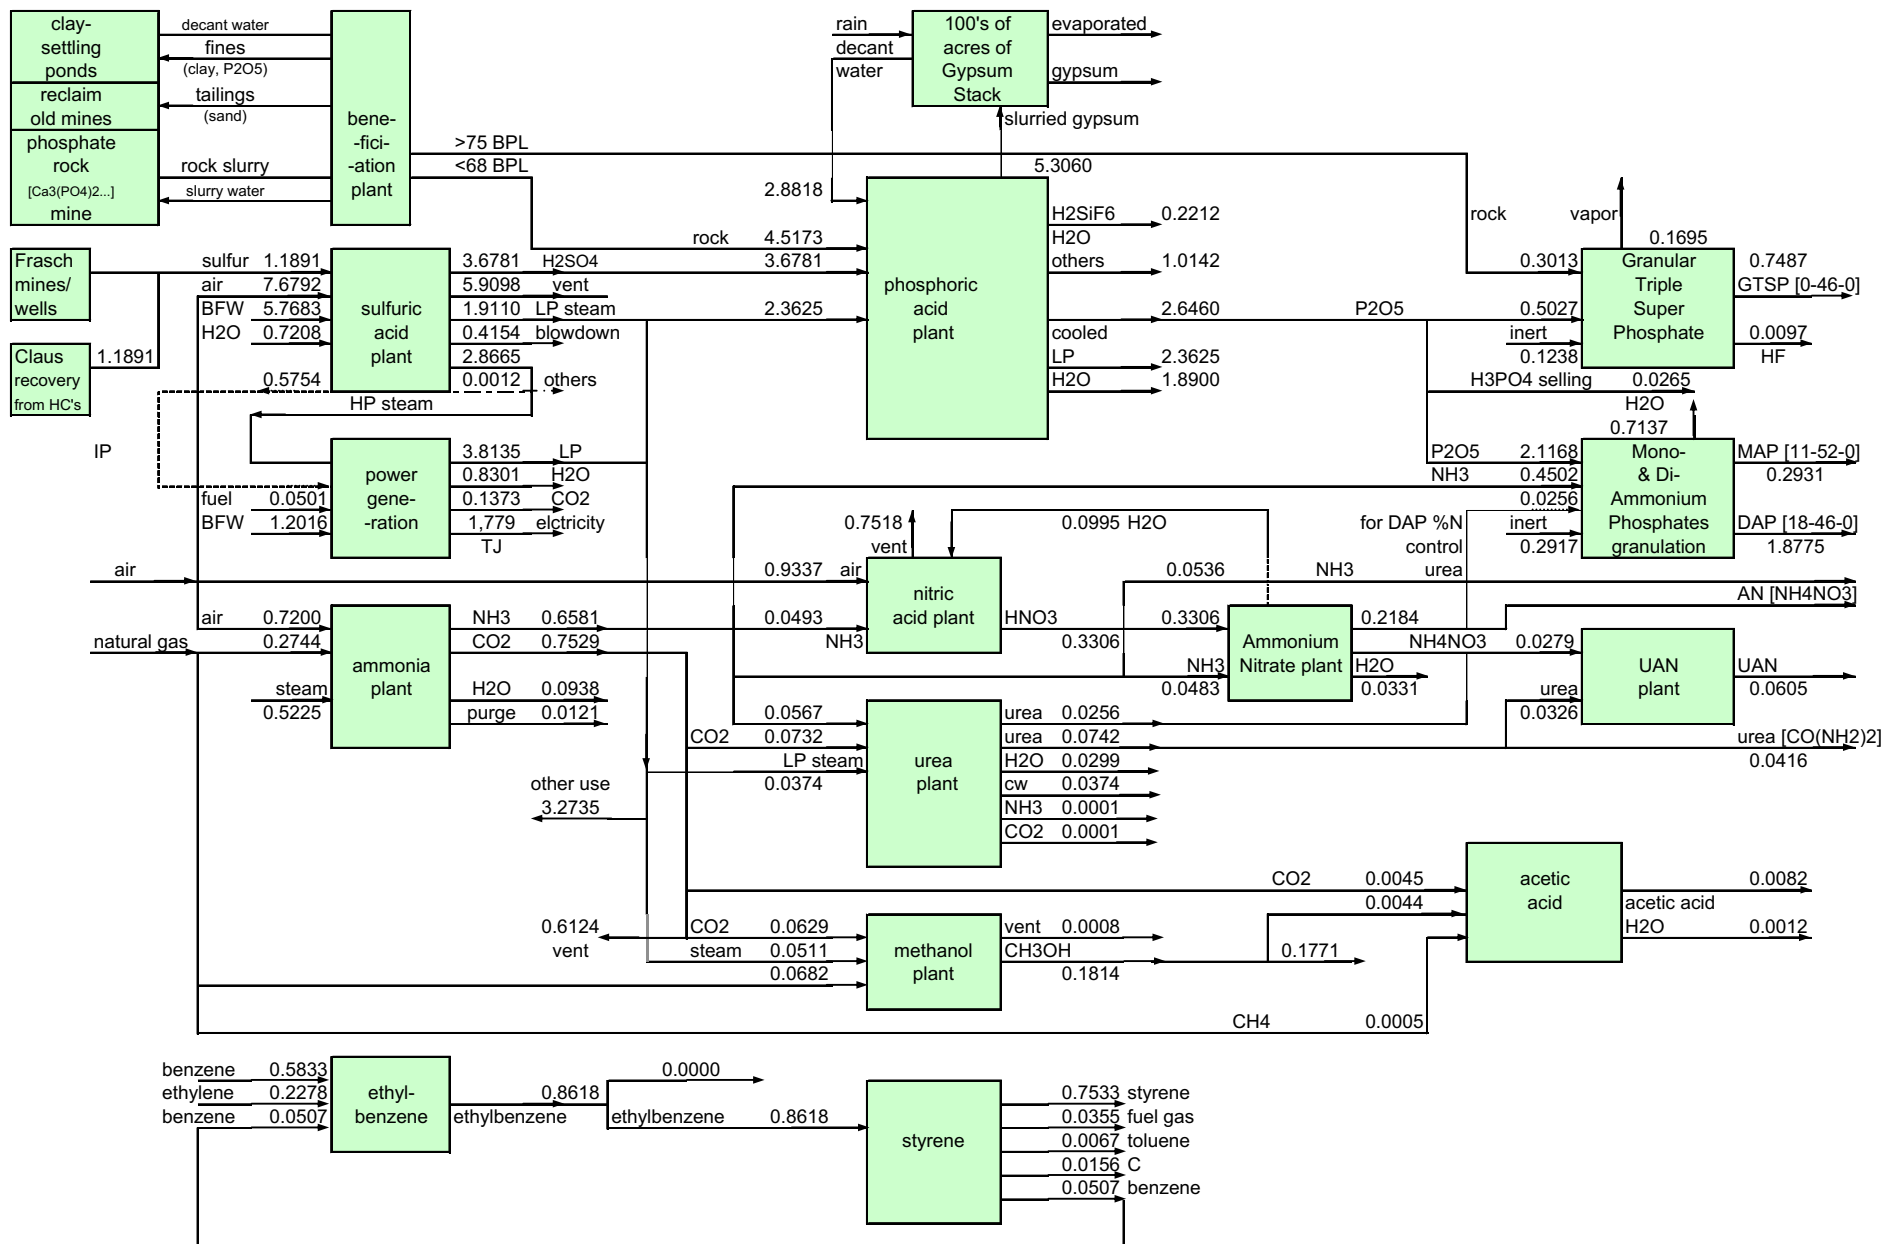

# Commercial Uses of CO<sub>2</sub>

Chemical synthesis in the U. S. consumes 110 million m tons per year of CO<sub>2</sub>

- Urea (90 million tons per year)
- Methanol (1.7 million tons per year)
- Polycarbonates
- Cyclic carbonates
- Salicylic acid
- Metal carbonates


# Surplus Carbon Dioxide

- Ammonia plants produce 0.75 million tons per year in lower Mississippi River corridor.
- Methanol and urea plants consume 0.14 million tons per year.
- Surplus high-purity carbon dioxide 0.61 million tons per year vented to atmosphere.
- Plants are connected by CO<sub>2</sub> pipelines.



# Greenhouse Gases as Raw Material


- Intermediate of fine chemicals for the chemical industry
  - C(O)O-: Acids, esters, lactones
  - O-C(O)O-: Carbonates
  - NC(O)OR-: Carbamio esters
  - NCO: Isocyanates
  - N-C(O)-N: Ureas
- Use as a solvent
- Energy rich products  
CO, CH<sub>3</sub>OH

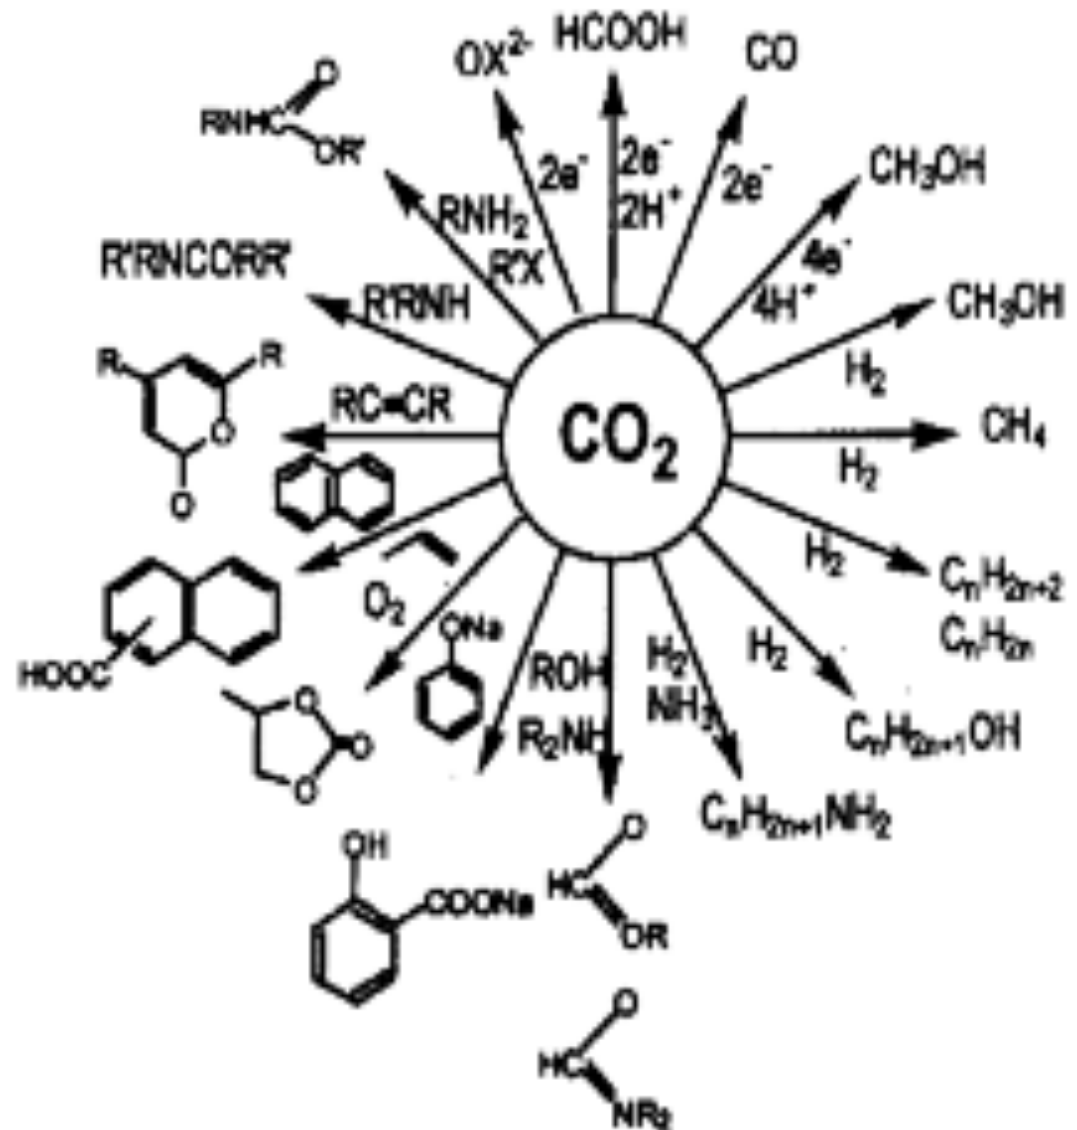


From Creutz and Fujita, 2000

# Some Catalytic Reactions of CO<sub>2</sub>

## Hydrogenation

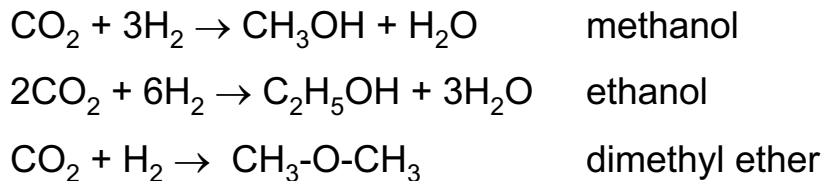


## Hydrolysis and Photocatalytic Reduction

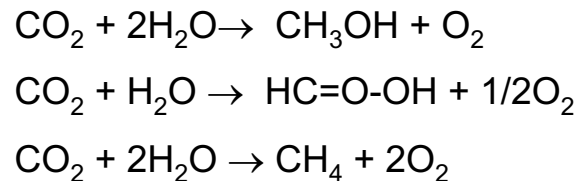


## Hydrocarbon Synthesis



## Carboxylic Acid Synthesis




## Other Reactions

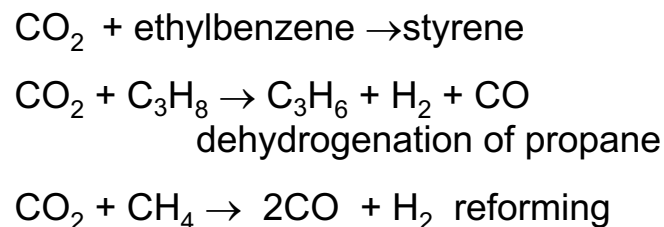

## Graphite Synthesis



## Amine Synthesis



# Methodology for Chemical Complex Optimization with New Carbon Dioxide Processes

- Identify potentially new processes
- Simulate with HYSYS
- Estimate utilities required
- Evaluate value added economic analysis
- Select best processes based on value added economics
- Integrate new processes with existing ones to form a superstructure for optimization

# Twenty Processes Selected for HYSYS Design

Chemical	Synthesis Route	Reference
Methanol	CO <sub>2</sub> hydrogenation	Nerlov and Chorkendorff, 1999
	CO <sub>2</sub> hydrogenation	Toyir, et al., 1998
	CO <sub>2</sub> hydrogenation	Ushikoshi, et al., 1998
	CO <sub>2</sub> hydrogenation	Jun, et al., 1998
	CO <sub>2</sub> hydrogenation	Bonivardi, et al., 1998
Ethanol	CO <sub>2</sub> hydrogenation	Inui, 2002
	CO <sub>2</sub> hydrogenation	Higuchi, et al., 1998
Dimethyl Ether	CO <sub>2</sub> hydrogenation	Jun, et al., 2002
Formic Acid	CO <sub>2</sub> hydrogenation	Dinjus, 1998
Acetic Acid	From methane and CO <sub>2</sub>	Taniguchi, et al., 1998
Styrene	Ethylbenzene dehydrogenation	Sakurai, et al., 2000
	Ethylbenzene dehydrogenation	Mimura, et al., 1998
Methylamines	From CO <sub>2</sub> , H <sub>2</sub> , and NH <sub>3</sub>	Arakawa, 1998
Graphite	Reduction of CO <sub>2</sub>	Nishiguchi, et al., 1998
Hydrogen/ Synthesis Gas	Methane reforming	Song, et al., 2002
	Methane reforming	Shamsi, 2002
	Methane reforming	Wei, et al., 2002
	Methane reforming	Tomishige, et al., 1998
Propylene	Propane dehydrogenation	Takahara, et al., 1998
	Propane dehydrogenation	C & EN, 2003

# Integration into Superstructure

- Twenty processes simulated
- Fourteen processes selected based on value added economic model
- Integrated into the superstructure for optimization with the System


# New Processes Included in Chemical Production Complex

Product	Synthesis Route	Value Added Profit (cents/kg)
Methanol	CO <sub>2</sub> hydrogenation	2.8
Methanol	CO <sub>2</sub> hydrogenation	3.3
Methanol	CO <sub>2</sub> hydrogenation	7.6
Methanol	CO <sub>2</sub> hydrogenation	5.9
Ethanol	CO <sub>2</sub> hydrogenation	33.1
Dimethyl Ether	CO <sub>2</sub> hydrogenation	69.6
Formic Acid	CO <sub>2</sub> hydrogenation	64.9
Acetic Acid	From CH <sub>4</sub> and CO <sub>2</sub>	97.9
Styrene	Ethylbenzene dehydrogenation	10.9
Methylamines	From CO <sub>2</sub> , H <sub>2</sub> , and NH <sub>3</sub>	124
Graphite	Reduction of CO <sub>2</sub>	65.6
Synthesis Gas	Methane reforming	17.2
Propylene	Propane dehydrogenation	4.3
Propylene	Propane dehydrogenation with CO <sub>2</sub>	2.5

# Application of the Chemical Complex Analysis System to Chemical Complex in the Lower Mississippi River Corridor


- Base case – existing plants
- Superstructure – existing and proposed new plants
- Optimal structure – optimal configuration from existing and new plants

# Chemical Complex Analysis System

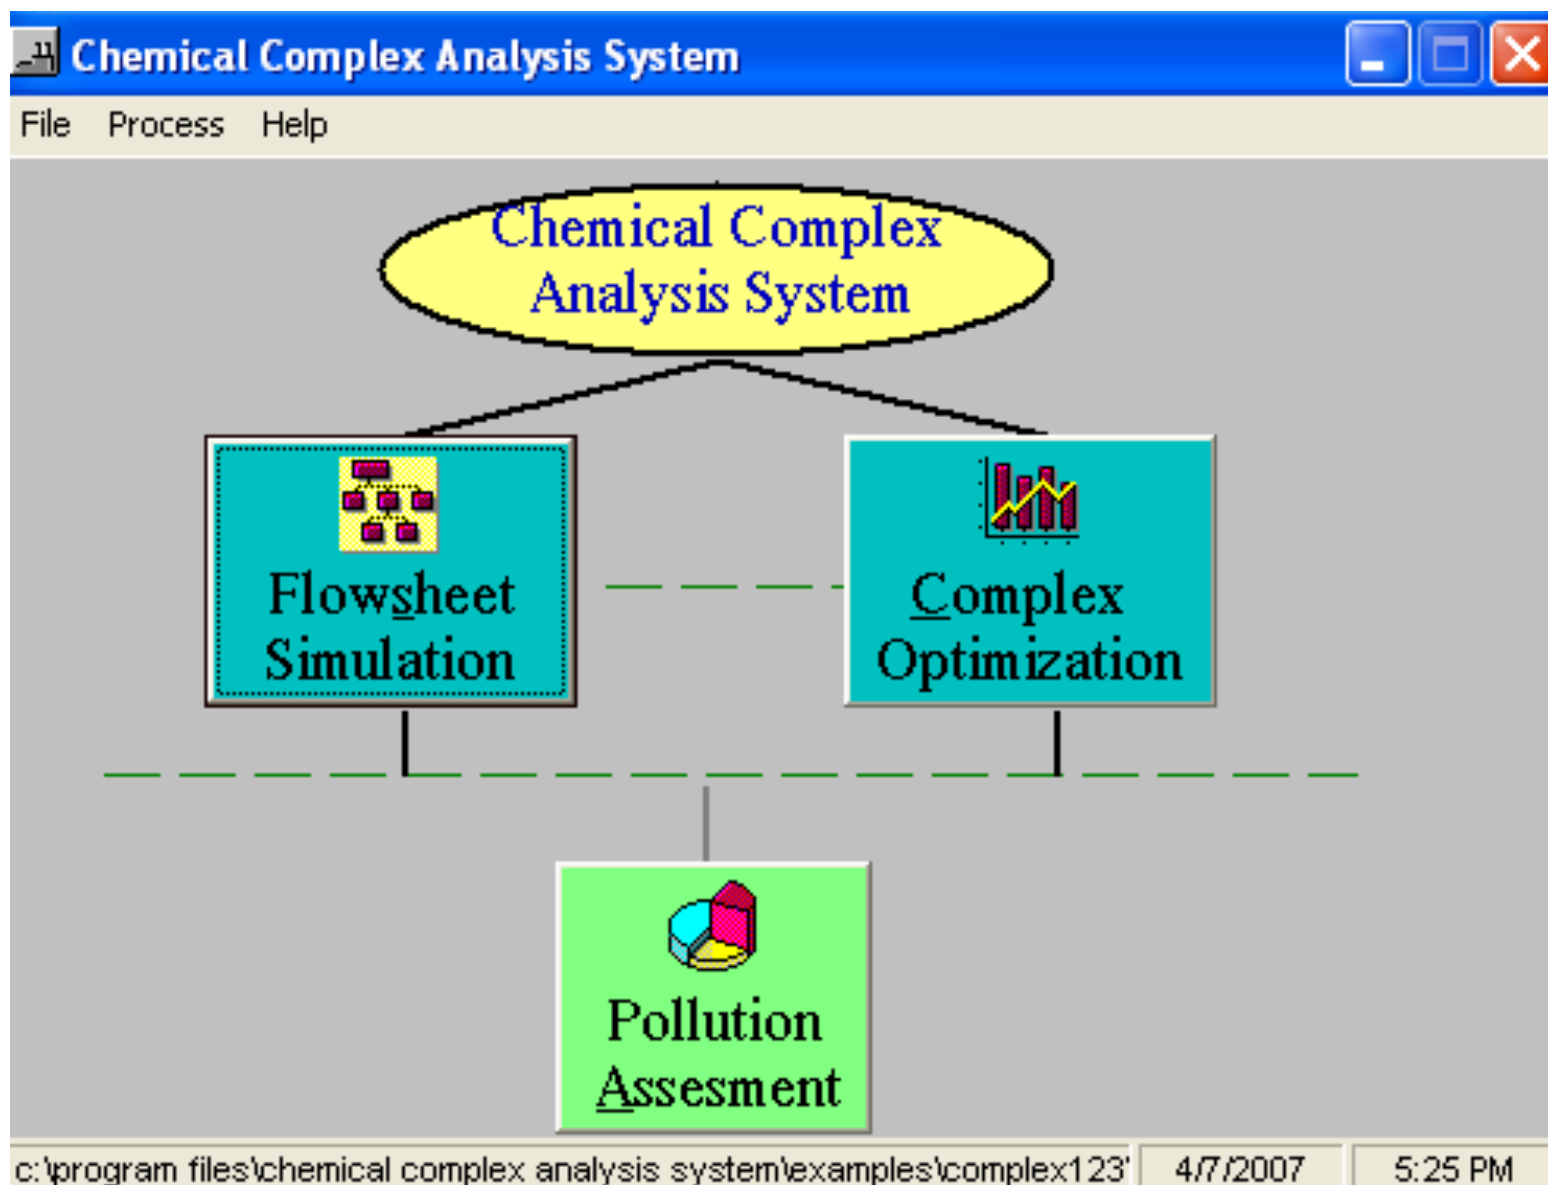




# Plants in the lower Mississippi River Corridor, Base Case. Flow Rates in Million Tons Per Year

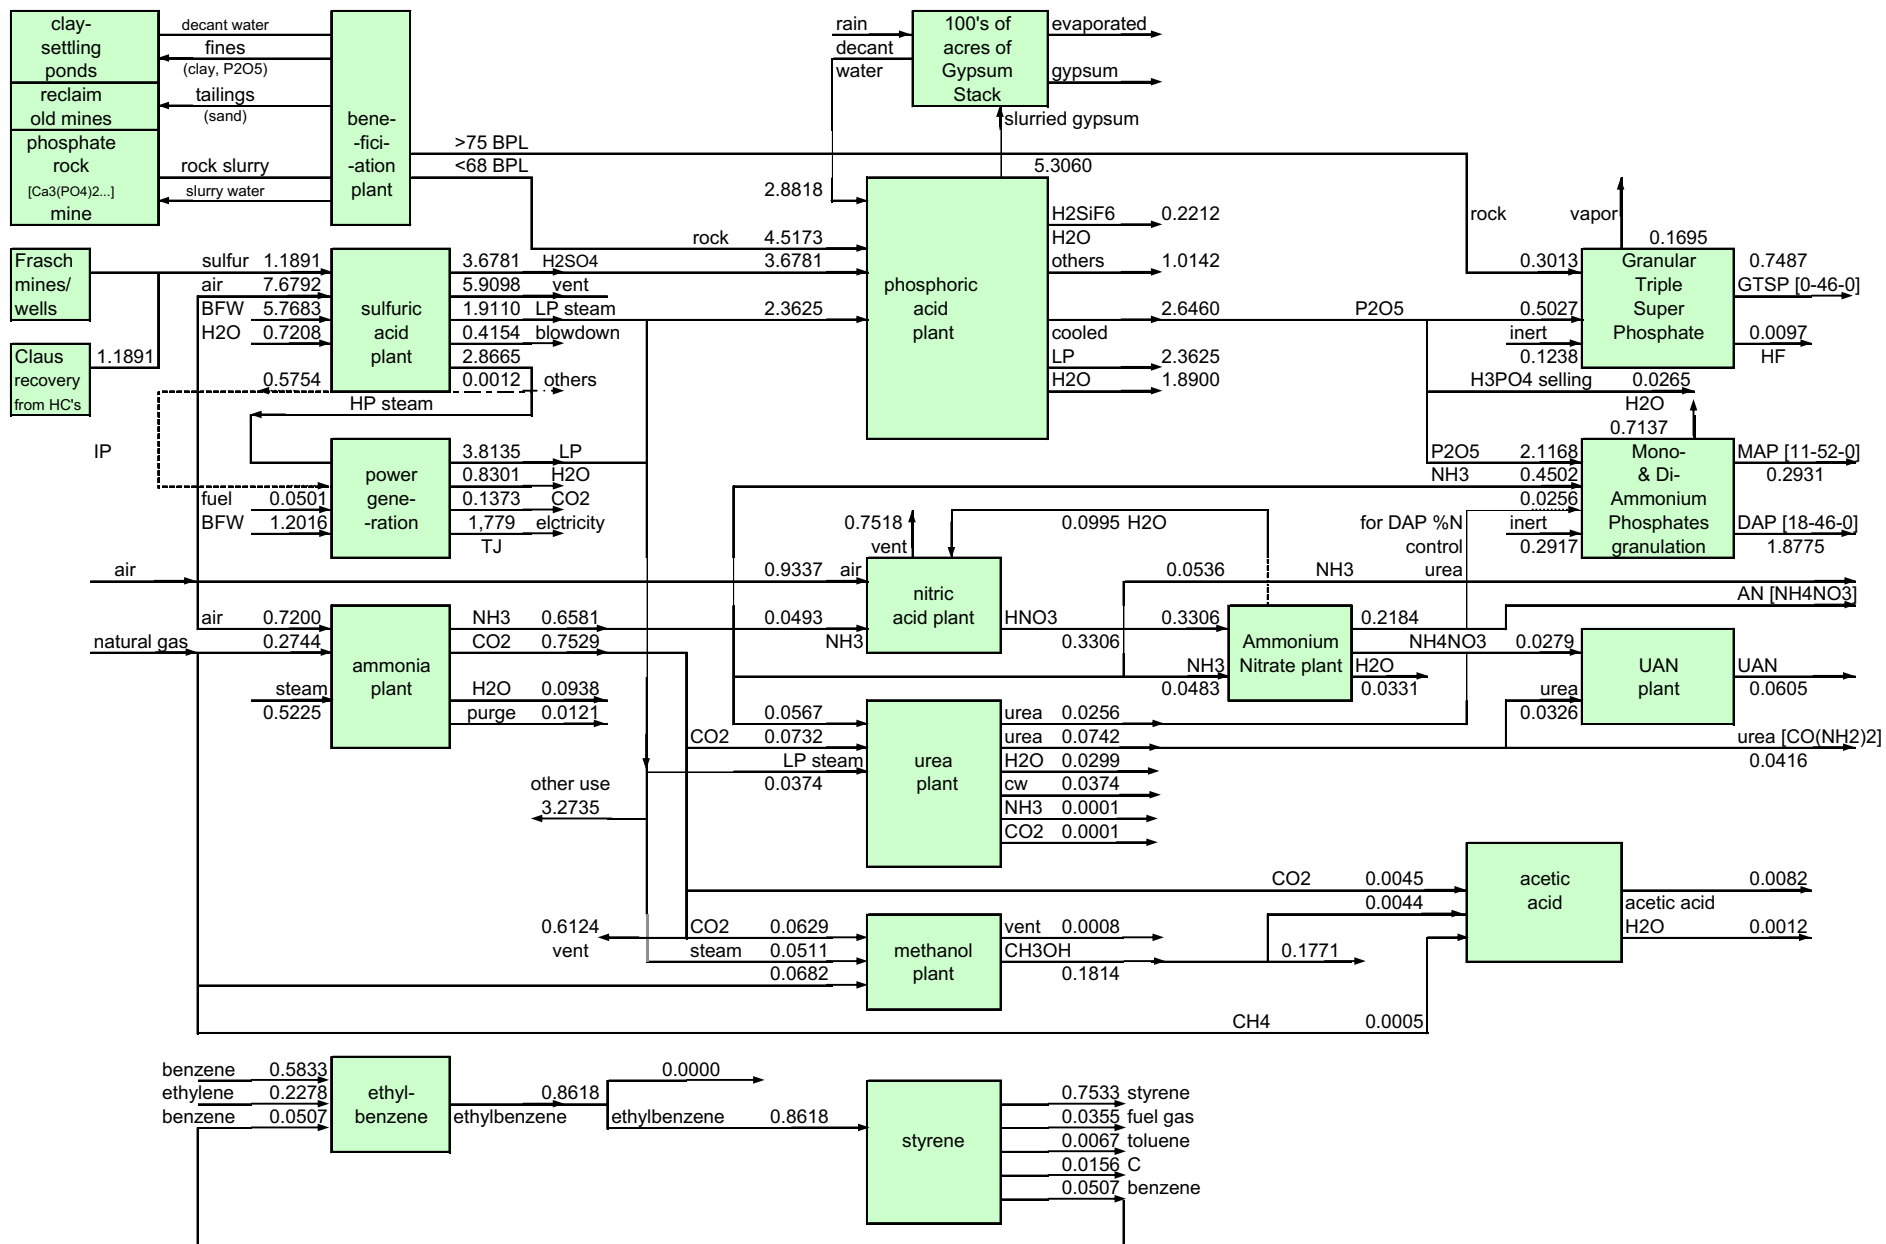

# Superstructure

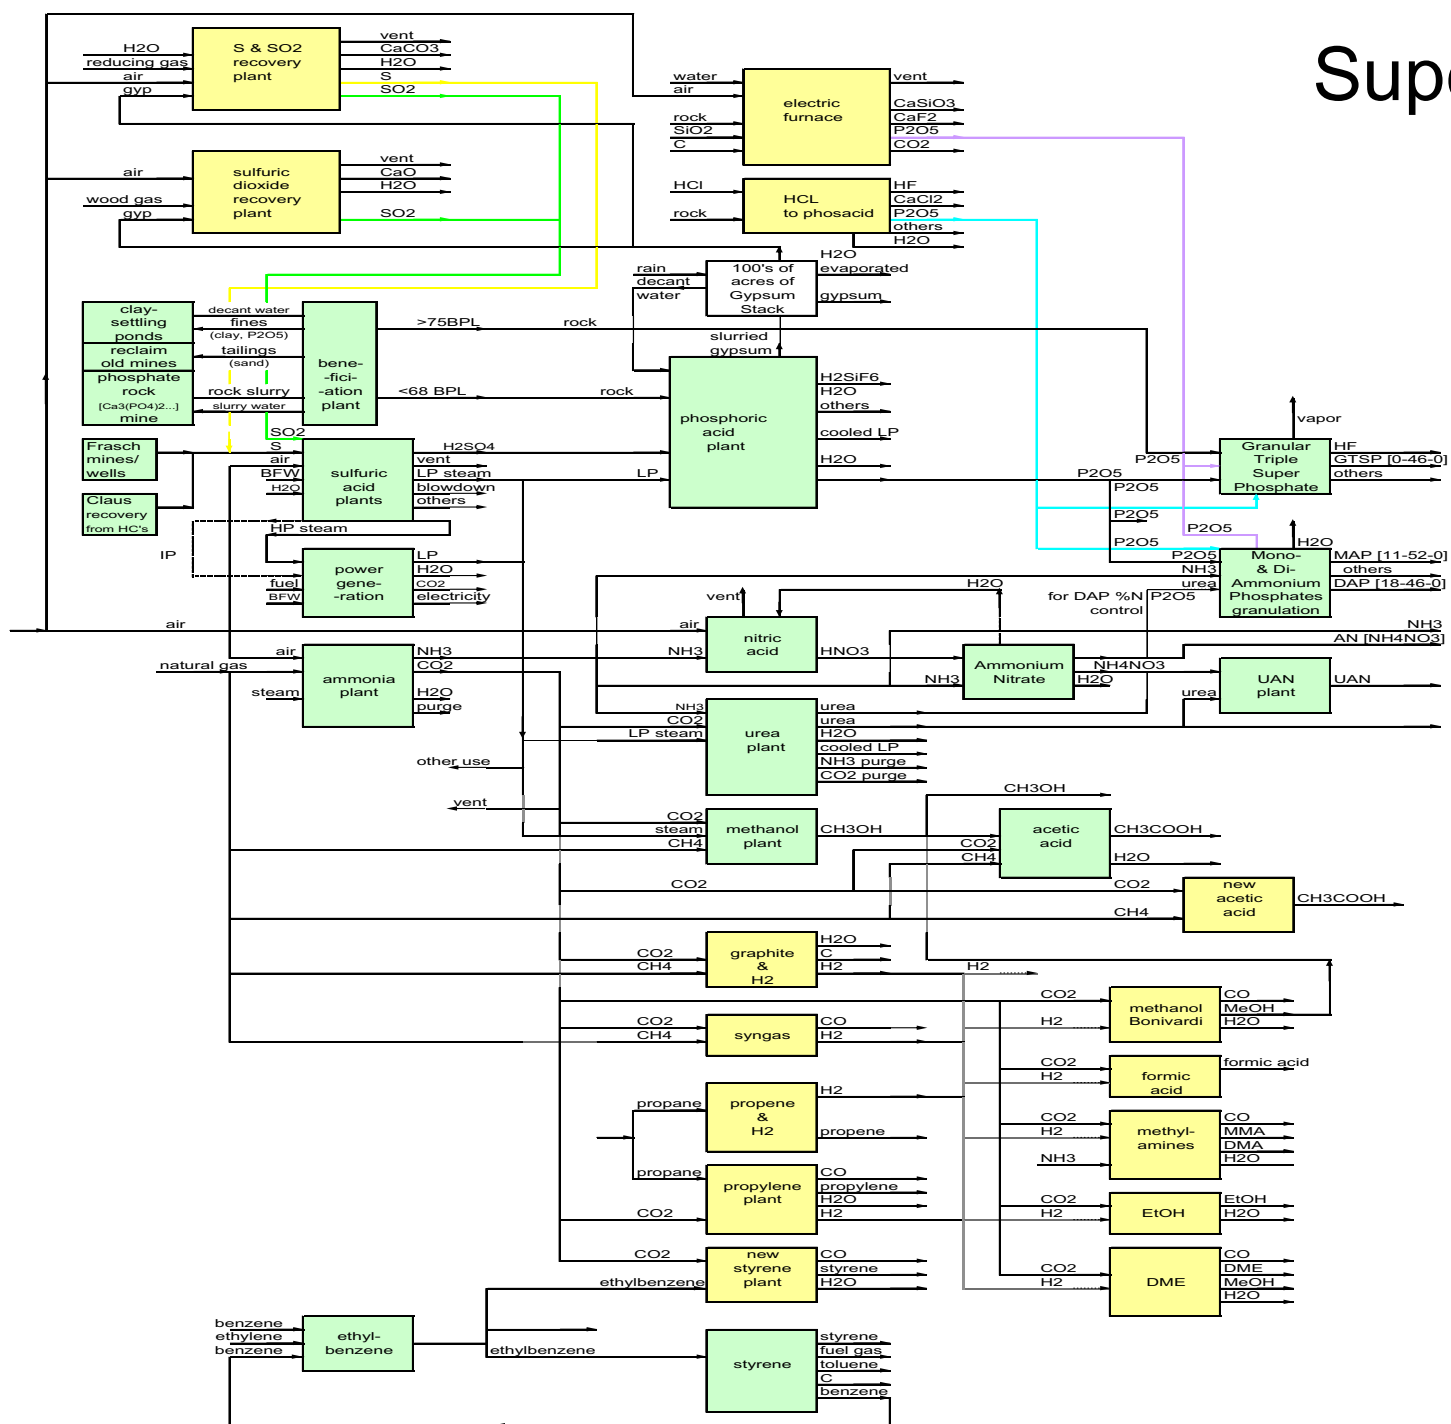

# Plants in the Superstructure

## Plants in the Base Case

- Ammonia
- Nitric acid
- Ammonium nitrate
- Urea
- UAN
- Methanol
- Granular triple super phosphate
- MAP and DAP
- Sulfuric acid
- Phosphoric acid
- Acetic acid
- Ethylbenzene
- Styrene

## Plants Added to form the Superstructure

- Acetic acid from  $\text{CO}_2$  and  $\text{CH}_4$
- Graphite and  $\text{H}_2$
- Syngas from  $\text{CO}_2$  and  $\text{CH}_4$
- Propane dehydrogenation
- Propylene from propane and  $\text{CO}_2$
- Styrene from ethylbenzene and  $\text{CO}_2$
- Methanol from  $\text{CO}_2$  and  $\text{H}_2$  (4)
- Formic acid
- Methylamines
- Ethanol
- Dimethyl ether
- Electric furnace phosphoric acid
- HCl process for phosphoric acid
- $\text{SO}_2$  recovery from gypsum
- S and  $\text{SO}_2$  recovery from gypsum

# Superstructure Characteristics

## Options

- Three options for producing phosphoric acid
- Two options for producing acetic acid
- Two options for recovering sulfur and sulfur dioxide
- Two options for producing styrene
- Two options for producing propylene
- Two options for producing methanol

## Mixed Integer Nonlinear Program

843 continuous variables

23 integer variables


777 equality constraint equations for material and energy balances

64 inequality constraints for availability of raw materials  
demand for product, capacities of the plants in the complex

# Some of the Raw Material Costs, Product Prices and Sustainability Cost and Credits

Raw Materials	Cost (\$/mt)	Sustainable Cost and Credits	Cost/Credit (\$/mt)	Products	Price (\$/mt)
Natural gas	235	Credit for CO2 consumption	6.50	Ammonia	224
Phosphate rock		Debit for CO2 production	3.25	Methanol	271
Wet process	27	Credit for HP Steam	11	Acetic acid	1,032
Electro-furnace	34	Credit for IP Steam	7	GTSP	132
Haifa process	34	Credit for gypsum consumption	5.0	MAP	166
GTSP process	32	Debit for gypsum production	2.5	DAP	179
HCl	95	Debit for NOx production	1,025	NH4NO3	146
Sulfur		Debit for SO2 production	192	Urea	179
Frasch	53			UAN	120
Claus	21			Phosphoric	496

Sources: Chemical Market Reporter and others for prices and costs,  
and AIChE/CWRT report for sustainable costs.

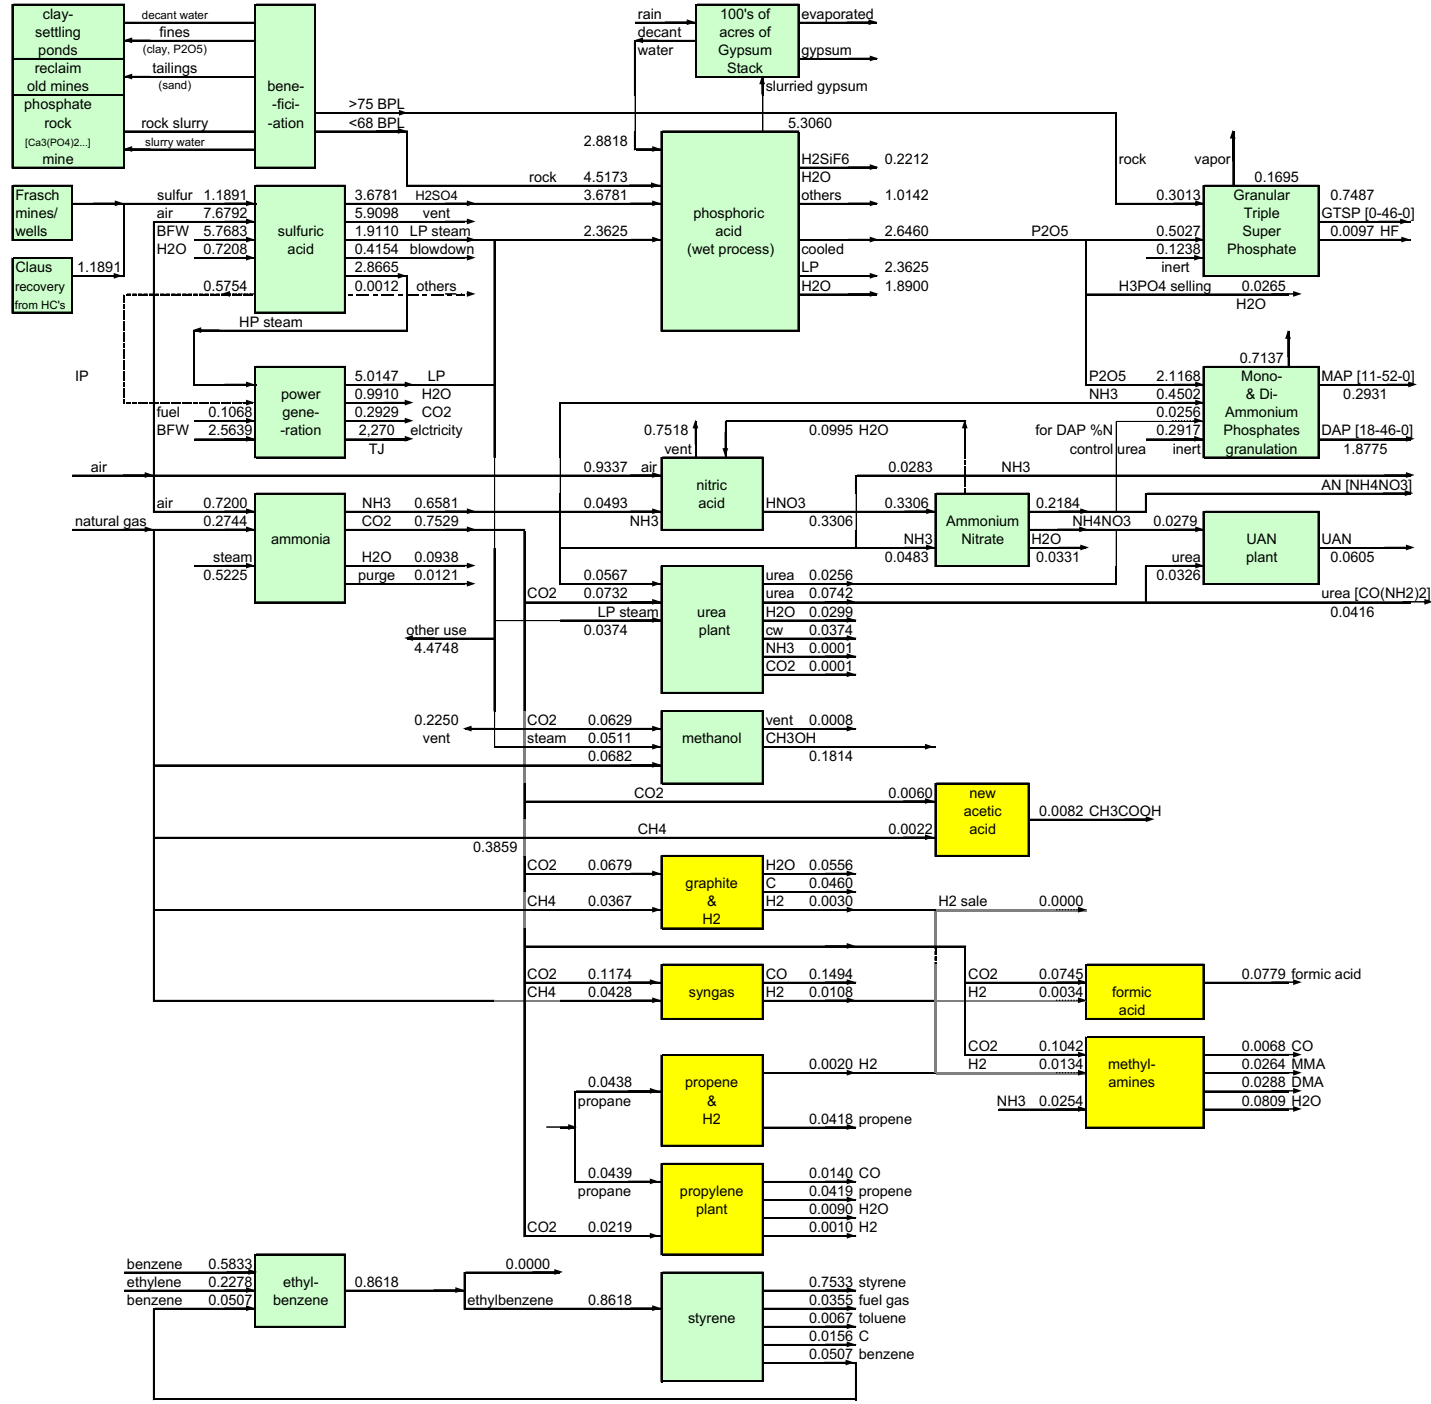

# Optimal Structure

# Plants in the Optimal Structure from the Superstructure

## Existing Plants in the Optimal Structure

Ammonia

Nitric acid

Ammonium nitrate

Urea

UAN

Methanol

Granular triple super phosphate (GTSP)

MAP & DAP

Power generation

Contact process for Sulfuric acid

Wet process for phosphoric acid

Ethylbenzene

Styrene

## Existing Plants Not in the Optimal Structure

Acetic acid

## New Plants in the Optimal Structure

Formic acid

Acetic acid – new process

Methylamines

Graphite

Hydrogen/Synthesis gas

Propylene from CO<sub>2</sub>

Propylene from propane dehydrogenation

## New Plants Not in the Optimal Structure

Electric furnace process for phosphoric acid

HCl process for phosphoric acid

SO<sub>2</sub> recovery from gypsum process

S & SO<sub>2</sub> recovery from gypsum process

Methanol - Bonivardi, et al., 1998

Methanol – Jun, et al., 1998

Methanol – Ushikoshi, et al., 1998

Methanol – Nerlov and Chorkendorff, 1999

Ethanol

Dimethyl ether

Styrene - new process

## Comparison of the Triple Bottom Line for the Base Case and Optimal Structure

	Base Case million dollars/year	Optimal Structure million dollars/year
Income from Sales	1,316	1,544
Economic Costs (Raw Materials and Utilities)	560	606
Raw Material Costs	548	582
Utility Costs	12	24
Environmental Cost (67% of Raw Material Cost)	365	388
Sustainable Credits (+)/Costs (-)	21	24
Triple Bottom Line	412	574



# Carbon Dioxide Consumption in Bases Case and Optimal Structure

	Base Case million metric tons/year	Optimal Structure million metric tons/year
CO <sub>2</sub> produced by NH <sub>3</sub> plant	0.75	0.75
CO <sub>2</sub> consumed by methanol, urea and other plants	0.14	0.51
CO <sub>2</sub> vented to atmosphere	0.61	0.24

All of the carbon dioxide was not consumed in the optimal structure to maximize the triple bottom line

Other cases were evaluated that forced use of all of the carbon dioxide, but with a reduced triple bottom line

# Multi-Criteria or Multi-Objective Optimization

$$\text{opt} \begin{bmatrix} y_1(x) \\ y_2(x) \\ \bullet \\ \bullet \\ y_p(x) \end{bmatrix}$$

min: cost

max: reliability

min: waste generation

max: yield

max: selectivity

*Subject to:*  $f_i(x) = 0$

# Multi-Criteria Optimization - Weighting Objectives Method

$$\textit{opt} \left[ w_1 y_1(x) + w_2 y_2(x) + \bullet \bullet + w_p y_p(x) \right]$$

*Subject to:*  $f_i(x) = 0$

*with*  $\sum w_i = 1$

Optimization with a set of weights generates efficient or Pareto optimal solutions for the  $y_i(x)$ .

Efficient or Pareto Optimal Solutions

Optimal points where attempting to improving the value of one objective would cause another objective to decrease.

There are other methods for multi-criteria optimization, e.g., goal programming, but this method is the most widely used one

# Multicriteria Optimization

$$\text{max:} \left\{ \begin{array}{l} P = \sum \text{Product Sales} - \sum \text{Manufacturing Costs} - \sum \text{Environmental Costs} \\ S = \sum \text{Sustainable (Credits - Costs)} \end{array} \right.$$

subject to: Multi-plant material and energy balances  
Product demand, raw material availability, plant capacities


# Multicriteria Optimization

Convert to a single criterion optimization problem

$$\text{max: } w_1 P + w_2 S$$

subject to:      Multi-plant material and energy balances  
                         Product demand, raw material availability,  
                         plant capacities

# Multicriteria Optimization

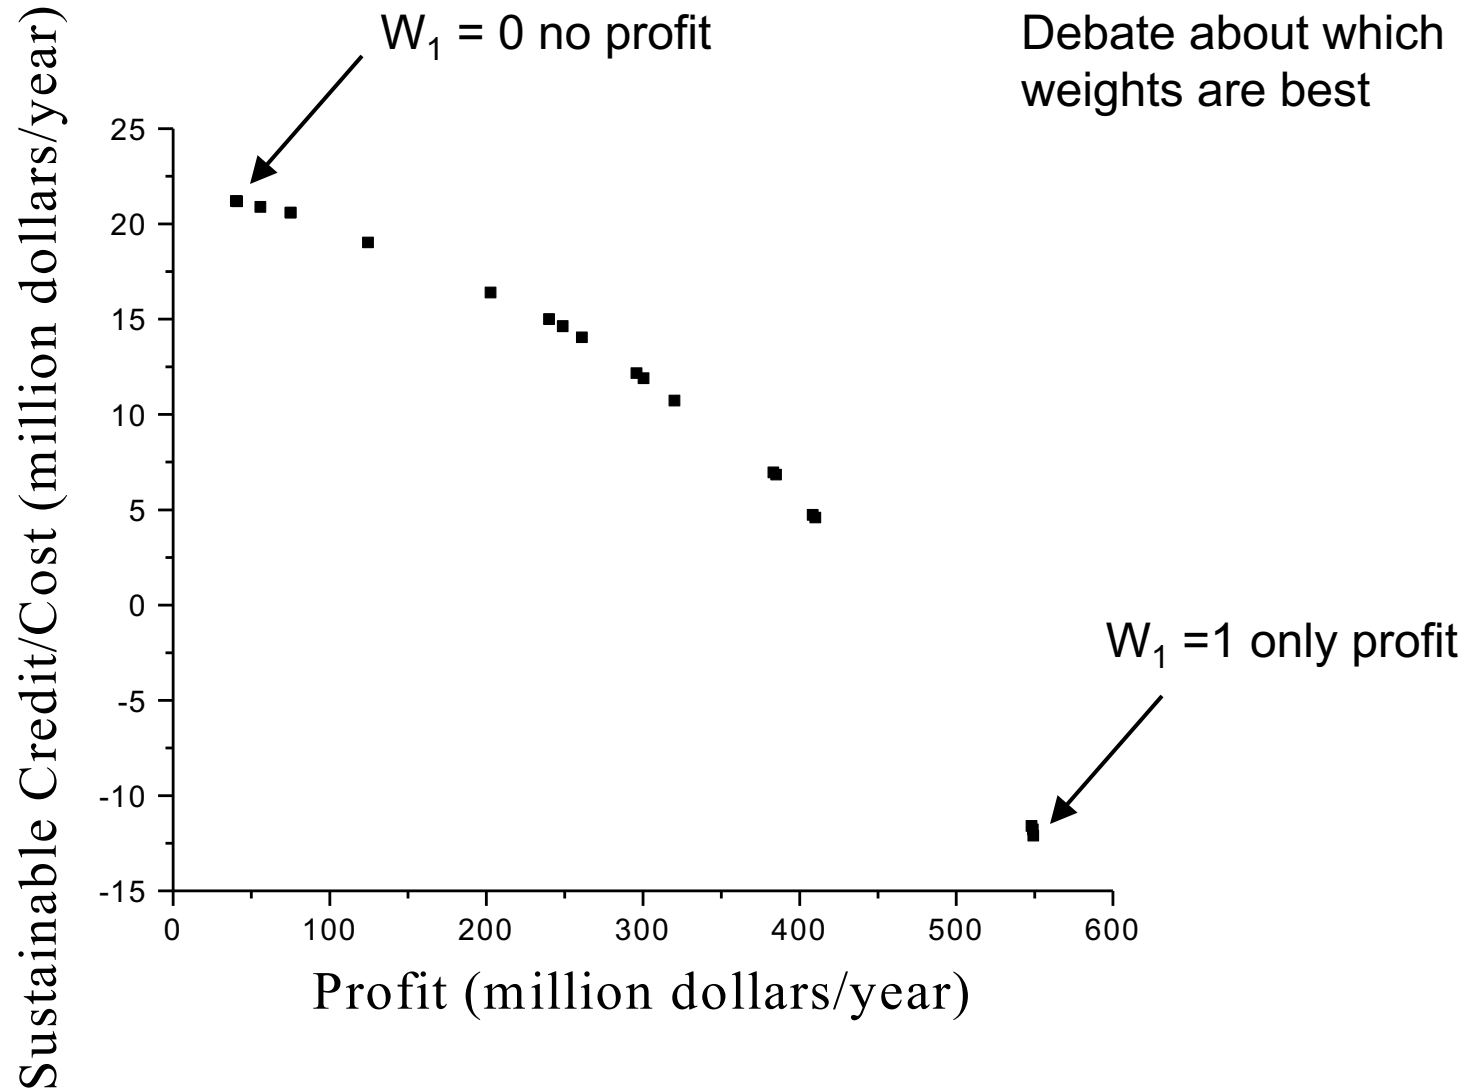

# Monte Carlo Simulation


- Used to determine the sensitivity of the optimal solution to the costs and prices used in the chemical production complex economic model.
- Mean value and standard deviation of prices and cost are used.
- The result is the cumulative probability distribution, a curve of the probability as a function of the triple bottom line.
- A value of the cumulative probability for a given value of the triple bottom line is the probability that the triple bottom line will be equal to or less that value.
- This curve is used to determine upside and downside risks

# Monte Carlo Simulation

Triple Bottom Line

Mean \$513million per year

Standard deviation - \$109 million per year

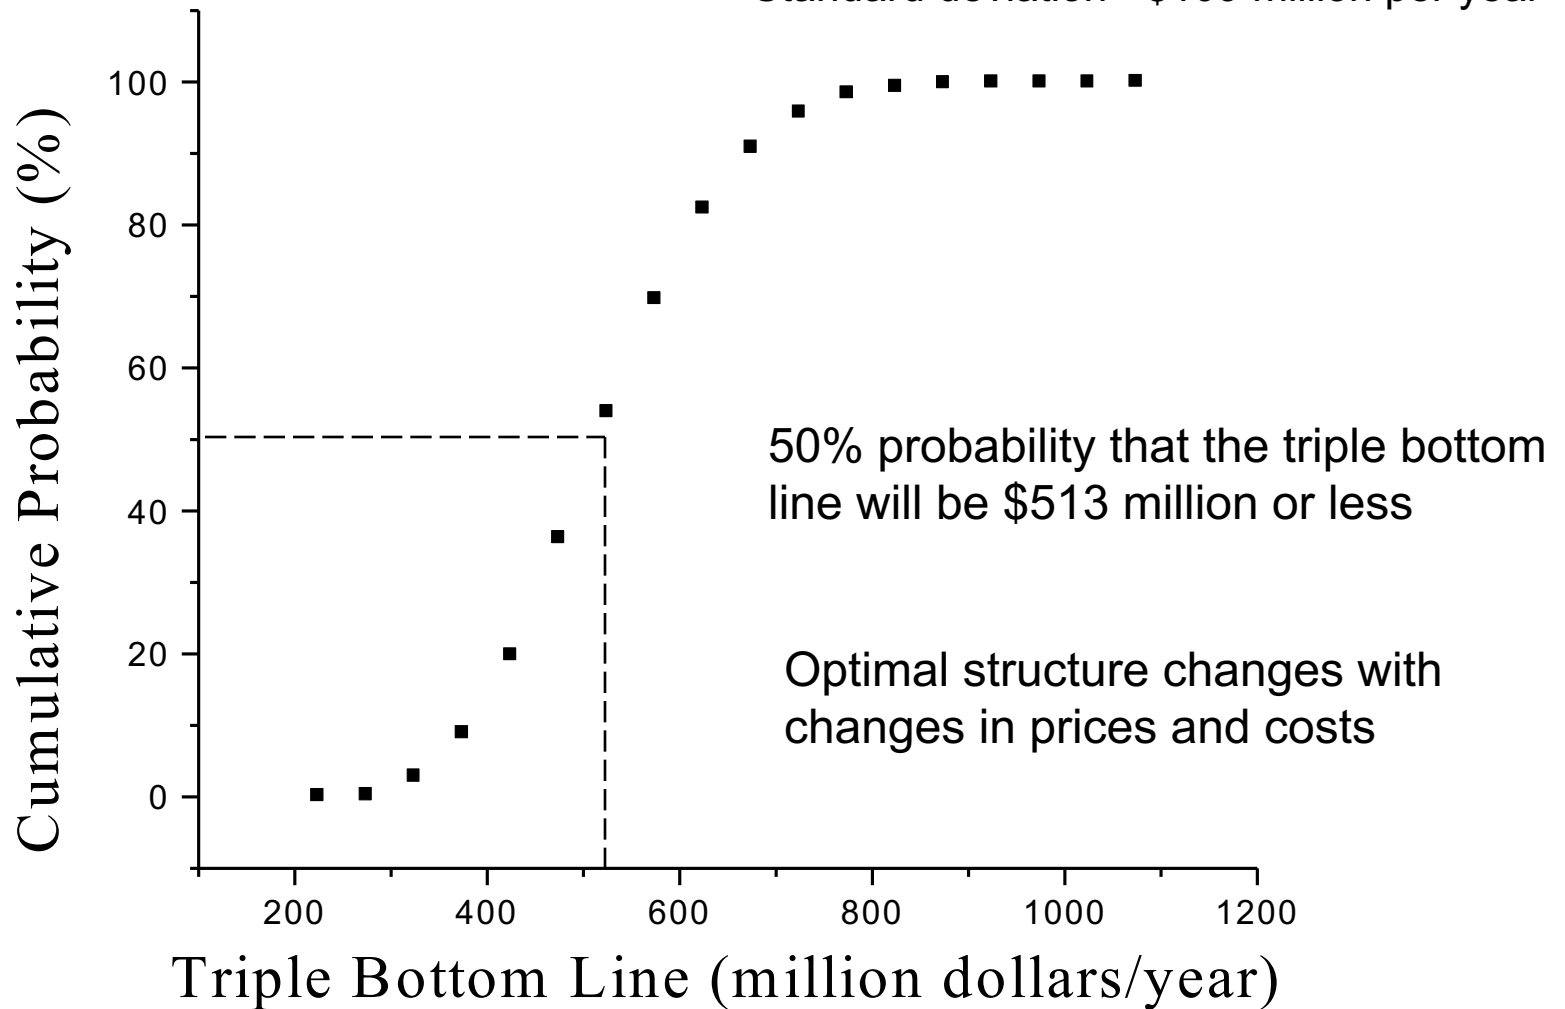



# Conclusions

- The optimum configuration of plants in a chemical production complex was determined based on the triple bottom line including economic, environmental and sustainable costs using the Chemical Complex Analysis System.
- Multicriteria optimization determines optimum configuration of plants in a chemical production complex to maximize corporate profits and maximize sustainable credits/costs.
- Monte Carlo simulation provides a statistical basis for sensitivity analysis of prices and costs in MINLP problems.
- Additional information is available at [www.mpri.lsu.edu](http://www.mpri.lsu.edu)

# Transition from Fossil Raw Materials to Renewables

Introduction of ethanol into the ethylene product chain.

Ethanol can be a valuable commodity for the manufacture of plastics, detergents, fibers, films and pharmaceuticals.

Introduction of glycerin into the propylene product chain.

Cost effective routes for converting glycerin to value-added products need to be developed.

Generation of synthesis gas for chemicals by hydrothermal gasification of biomaterials.

The continuous, sustainable production of carbon nanotubes to displace carbon fibers in the market. Such plants can be integrated into the local chemical production complex.

Energy Management Solutions: Cogeneration for combined electricity and steam production (CHP) can substantially increase energy efficiency and reduce greenhouse gas emissions.

# Global Optimization

Locate the global optimum of a mixed integer nonlinear programming problem directly.

Branch and bound separates the original problem into sub-problems that can be eliminated showing the sub-problems that can not lead to better points

Bound constraint approximation rewrites the constraints in a linear approximate form so a MILP solver can be used to give an approximate solution to the original problem. Penalty and barrier functions are used for constraints that can not be linearized.

Branch on local optima to proceed to the global optimum using a sequence of feasible sets (boxes).

Box reduction uses constraint propagation, interval analysis convex relations and duality arguments involving Lagrange multipliers.

Interval analysis attempts to reduce the interval on the independent variables that contains the global optimum

Leading Global Optimization Solver is BARON, Branch and Reduce Optimization Navigator, developed by Professor Nikolaos V. Sahinidis and colleagues at the University of Illinois is a GAMS solver.

Global optimization solvers are currently in the code-testing phase of development which occurred 20 years ago for NLP solvers.

# Acknowledgements

## Collaborators

Dean Jack R. Hopper

Professor Helen H. Lou

Professor Carl L. Yaws

## Graduate Students

Xueyu Chen

Zajun Zang

Aimin Xu

Sudheer Indala

Janardhana Punru

## Post Doctoral Associate

Derya Ozyurt

## Support

Gulf Coast Hazardous Substance Research Center


Department of Energy

## Industry Colleagues

Thomas A. Hertwig, Mosaic

Michael J. Rich, Motiva

# Minerals Processing Research Institute

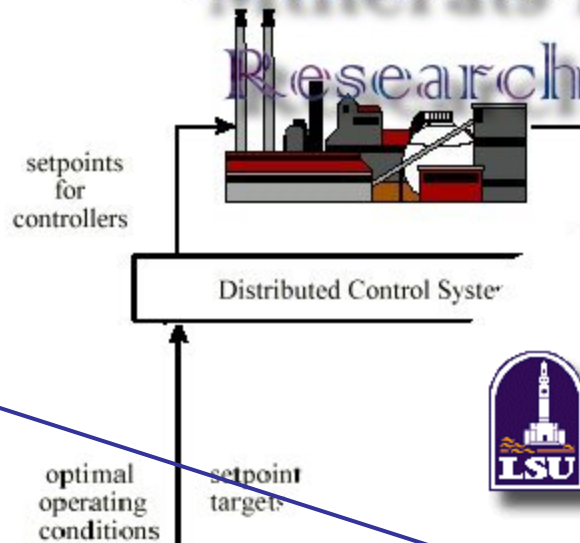

Louisiana  
State  
University

Home  
Research  
Emphasis  
Collaboration  
Computer  
Programs  
Research Results  
Internet Courses  
Text Book  
Industry  
Associates  
Staff  
Contact

**Mission**  
**History**  
**Research  
Directions**

Processing, economic  
mineral of the State:  
lignite.  
Formed in 1979 as one of  
Mineral Institutes.  
Focus on minerals processing  
petroleum refineries,  
Agrico, Monsanto, and

Preface Before You Begin Table of Contents Solution Manual

## Optimization for Engineering Systems

by

Ralph W. Pike

Professor of Chemical Engineering and Systems Science

Louisiana State University

[www.mpri.lsu.edu](http://www.mpri.lsu.edu)